


Pressure transmitter

PGT35

SENSOR TYPE:	PIEZORESISTIVE GAUGE
OUTPUT:	4÷20mA
RANGE:	-0,5÷35,0 BAR
ACCURACY:	MAX±1%FS (0÷50°C)
SHEATH:	Ø17x58 MM
CONNECTIONS:	MPM CONNECTOR
PRESSURE PORT:	7/16"-20UNF MALE, STEEL AISI 316L
PROTECTION:	IP65
AMBIENT TEMPERATURE:	-40÷100°C
POWER SUPPLY:	8÷32Vdc

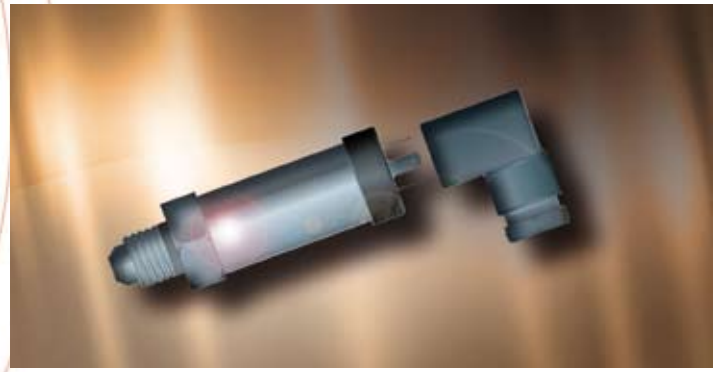

S-28-FB

FIXING BAR FOR 28 SERIES



SBC485 Converter

To be used in conjunction with TAB software in case of hard-wired system - RS232 to RS485 interface between PC and connected controllers.

Technical Data

DIMENSIONS	110x75x53 mm (WxHxD)
AMBIENT TEMPERATURE	0...+50°C
RS232 CONNECTION	DB9 FEMALE CONNECTOR
RS485 CONNECTION	8-POLE RJ45 CONNECTOR
MAXIMUM LOAD	63 PERIPHERALS+ 120OHM TERMINATION
CONNECTION LENGTH	1.2KM
POWER SUPPLY	115V OR 230VAC
CONSUMPTION	3W
FRONT PROTECTION	IP20



Transformers

Code	Voltage of primary	Voltage of secondary	Frequency	Power	Dimensions (WxHxD mm)	Overtmp. protection	Approvals
TR230	230Vac	12Vac/dc	50/60 Hz.	3VA	60.5x48x36		ENEC
TR230F	230Vac	12Vac/dc	50/60 Hz.	3VA	60.5x48x36	✓	ENEC
TR240	240Vac	12Vac/dc	50/60 Hz.	3VA	60.5x48x36		ENEC
TR110	110Vac	12Vac/dc	50/60 Hz.	3VA	60.5x48x36		
TR115	115Vac	12Vac/dc	50/60 Hz.	3VA	60.5x48x36		UL
TR24/12V	24Vac	12Vac/dc	50/60 Hz.	3VA	60.5x48x36		

