

Temperature Probes

SN2K..P

SENSOR TYPE:	NTC2K, 2000Ω @ 25°C
RANGE:	-40 ÷ 105°C
ACCURACY:	±0.3°C @ 25°C
SHEATH:	Ø6x34mm; TPE
CABLE:	2 WIRES x 0.35mm ² ; -40 ÷ 105°C; TPE; POINTS
PROTECTION:	IP67

SN4K..P


SENSOR TYPE:	NTC10K, 10000Ω @ 25°C
RANGE:	-40 ÷ 105°C
ACCURACY:	±0.3°C @ 25°C
SHEATH:	Ø6x34mm; TPE
CABLE:	2 WIRES x 0.35mm ² ; -40 ÷ 105°C; TPE; POINTS
PROTECTION:	IP67

ST1K..C/P

SENSOR TYPE:	KTY81-121, 990Ω @ 25°C
RANGE:	-40 ÷ 105°C
ACCURACY:	±1.5°C @ 25°C
SHEATH:	Ø6x34mm; TPE
CABLE:	2 WIRES x 0.35mm ² ; -40 ÷ 105°C; TPE; CONNECTOR OR POINTS
PROTECTION:	IP67

ST1N..P-

SENSOR TYPE:	KTY81-121, 990Ω @ 25°C
RANGE:	-40 ÷ 110°C
ACCURACY:	±1.5°C @ 25°C
SHEATH:	Ø7x40mm; NYLON6
CABLE:	3 WIRES x 0.22mm ² ; SCREEN; -40 ÷ 110°C; PETE; POINTS
PROTECTION:	IP67

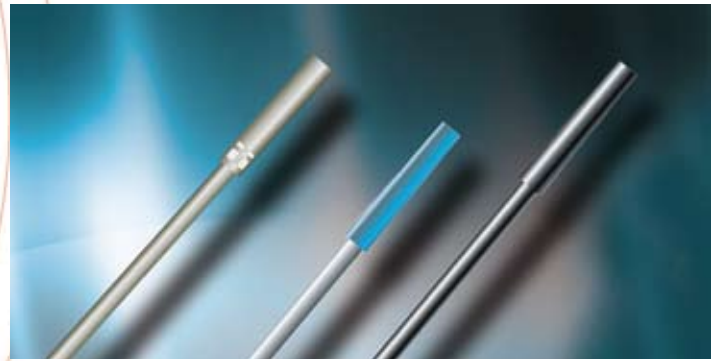

Humidity transmitters

HT2WAD

SENSOR TYPE:	CAPACITIVE
OUTPUT SIGNAL:	0 ÷ 1VDC
RANGE:	0% ÷ 100%r.H.
ACCURACY:	±5%r.H. (25% ÷ 75%r.H.)
SHEATH:	Ø14x40mm
PROTECTION:	IP65 (ELECTRONICS)
OPERATING TEMPERATURE:	0 ÷ 75°C (SENSOR) / 0 ÷ 50°C (ELECTRONICS)
DIMENSIONS OF THE ENCLOSURE:	110x53x75mm (ELECTRONICS)
POWER SUPPLY:	12VDC, 0.2W



Humidity and temperature transmitter

HT2WSE

SENSOR TYPE:	CAPACITIVE
OUTPUT SIGNAL:	RS485
RANGE:	0% ÷ 100%r.H. / 0 ÷ 70°C
ACCURACY:	±5%r.H. (25% ÷ 75%r.H.) / ±0.3°C @ 25°C; ±1°C (0 ÷ 70°C)
SHEATH:	Ø14x40mm
PROTECTION:	IP65 (ELECTRONICS)
OPERATING TEMPERATURE:	0 ÷ 75°C (SENSOR) / 0 ÷ 50°C (ELECTRONICS)
DIMENSIONS OF THE ENCLOSURE:	110x53x75mm (ELECTRONICS)
POWER SUPPLY:	12VDC, 0.2W