

EOL TEST



WORLDWIDE SALES















Suitable for use R290

Wireless connection

Bluetooth

Internet of Things

GLOBAL MARKET PRESENCE

Today millions of professional and commercial refrigerators, blast chillers and freezers, dough-retarder provers, ovens, air conditioners, compressed air dryers are controlled by high-performance regulators. You may often wonder who manufactures these customized electronic controls.

If you see a product operating with innovative technology & long lasting performance it is likely to be our LAE ELECTRONIC brand.

LEADER IN CUSTOMIZED CONTROLLERS

For many years we have proven to be leaders in the designing of customized controllers based on the technical specifications and design of the system to be controlled. For over thirty years, we have supported innovative changes requested by some of the most reputable world manufacturers.

Our Customers recognize the competency and the unique know-how with which we approach the project phases, creating synergies for the development of original and unique proposals. Solutions we help provide are the key to the complete success of their system.

PERFECT INTEGRATION

We aim to produce a perfect integration into your applications, without compromise, making LAE Electronic controllers among the best ever in the global marketplace. Our products have a solid reputation for reliability and incredible efficiency in the toughest working conditions. Being aesthetically sophisticated and easy to operate, they are just as user-friendly as a tablet or a smartphone.

ENVIRONMENT & ETHICAL CODE

LAE policy is to always respect all environmental protection concerns that are important to all consumers. We develop functions and adopt technologies that best meet the growing needs for energy saving and low environmental impact.

Another cornerstone of our company policy is focused on ethical treatment of all workers. We closely work with exclusively selected suppliers that have adopted ethical codes.


CONNECTIVITY


Our R&D division is continuously engaged in the assessment of the latest generation of new technologies, especially with respect to the collection and processing of data. These connectivity features are now easily obtainable providing great functionality for the enduser and the manager. Machines that communicate and coordinate among them, by means of our controllers, form a much more efficient and easily controllable system, with enormous benefits in terms of safety, process stability and product quality.





Leader in the designing of high-profile solutions

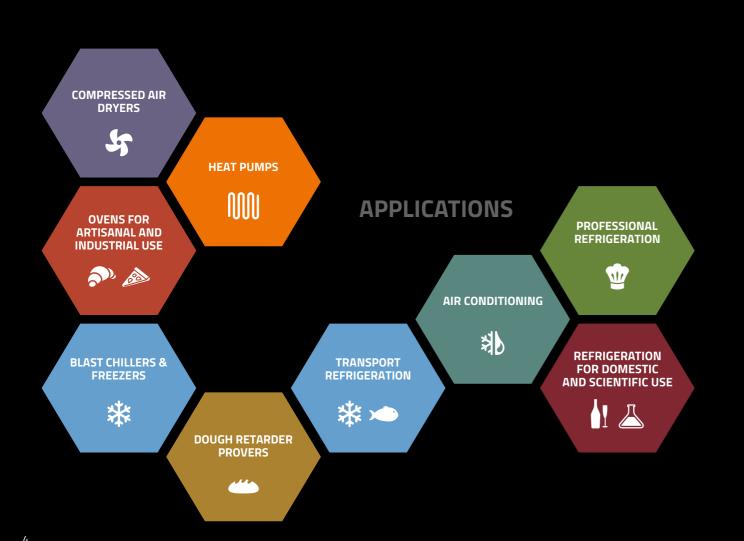




The major world players recognise the competency and the unique knowhow with which we approach the project phases. This has become our corebusiness, allowing an expansion in turnovers and means.



Touch screen displays

We offer high-performance TFT touch screen displays with various formats, from 4.3" up to 10", both capacitive and resistive.

The variety of graphic options is unlimited, in order to offer the most suitable configuration to those who daily need to work with an intuitive and effective interface, featuring no complications.

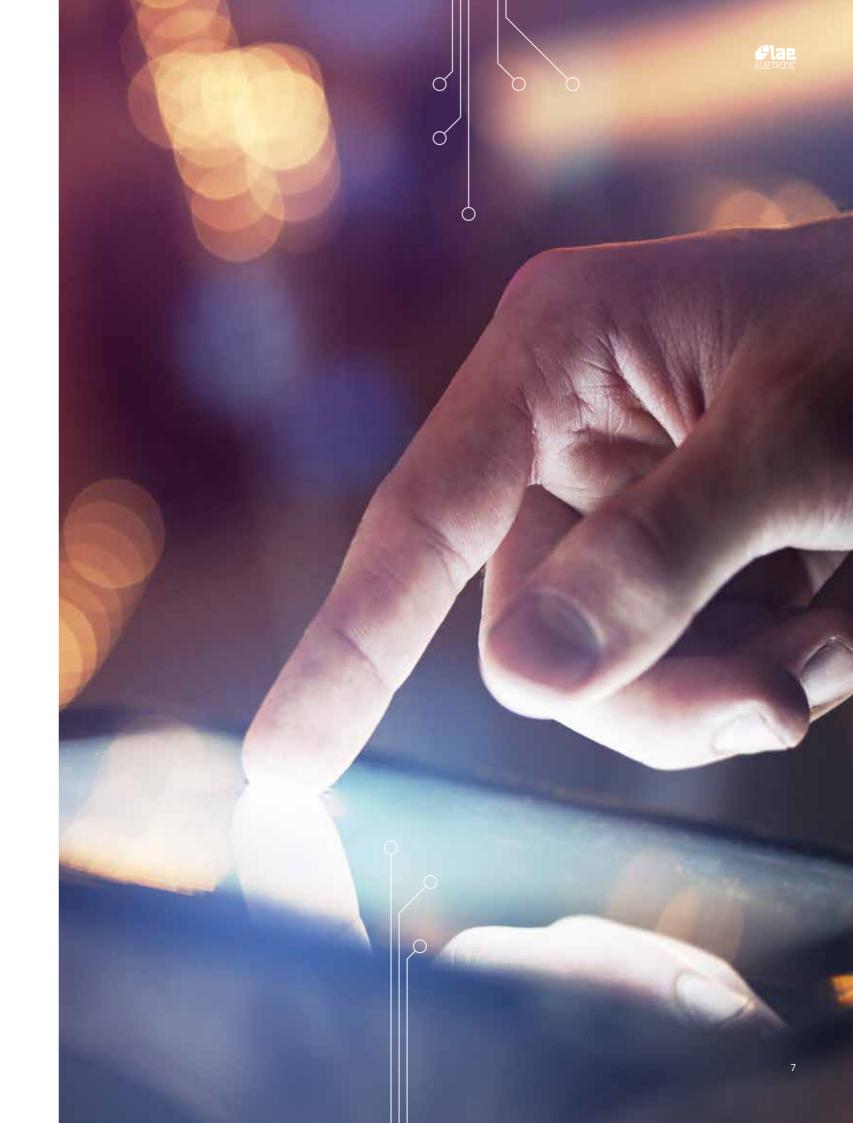




A cloud-based software suitable for use with the LAE controllers, accessible anywhere and anytime via a web browser or mobile App.

Its User Interface may be **customised** to suit the specific customer's requirements as to webpage layout, colours, logo and functions.

The adoption of the **most updated security and privacy standards** is guaranteed at all times.





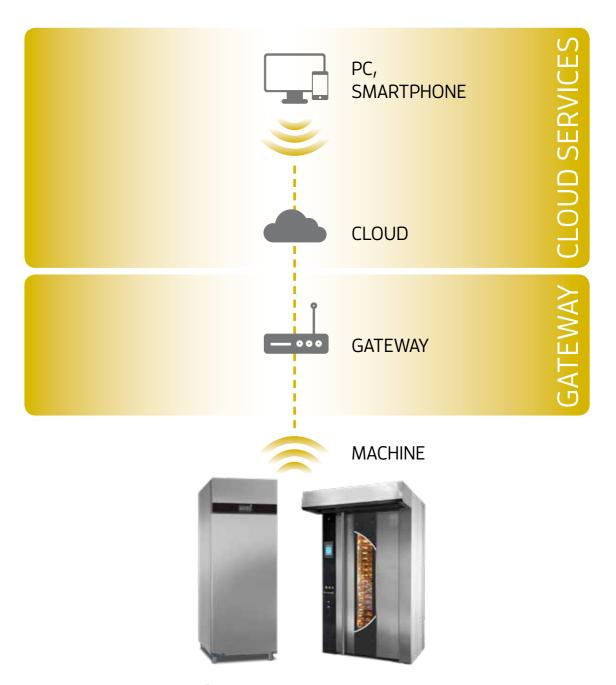

The complete scenario of the plant connected is always and anywhere **under control via your Smartphone**, **tablet or PC**.

Maximum productivity is thus ensured and the risk of downtimes, unpredicted maintenance costs and high operation costs is actually eliminated.

A precise continual supervision allows the machine parameters to be programmed when needed and machine components to be serviced or replaced in a timely manner so as to always maintain the best product quality and texture without the risk of losses.

This cloud-based software is a very powerful service tool to **add** significant **value to the offer range of OEMs**, service engineers and system managers, ensuring peace of mind, long lasting operation and optimised performance of the machines.

Gateway















GTW-0X

For IoT communication

90 x 60 x 28 mm

Main Features

- WiFi: IEEE 802.11 b/g/n
- Bluetooth
- GSM/GPRS/EDGE, UMTS/HSDPA/HSUPA and NB-IoT networks supported
- SIM connector
- Connector for LCD LVDS display
- RTC

Applications

Air conditioners, heating systems, commercial and professional refrigerators, blast chillers and freezers, dough-retard provers, heating/cooling combi catering machines, professional ovens, ice makers, transport refrigeration, high-end domestic refrigerators.

	Technical Data
CPU	NXP i.MX 6ULL
Core	Cortex-A7 @ 800MHz
Memory	28MB DDR3-800, 256MB SLC NAND Flash
OS	Linux embedded, YOCTO project (rev. 4.1.43)
10/100 Ethernet interf	ace
USB Type A	
microSD	
RS485	
RS232	
Power supply	7 to 40 Vdc
Tiny Size	90 x 60 x 28 mm
Internal web server	

- The GTW-0x Gateway is a computer with Operating System, memory and communication ports, designed specifically to run IoT communication securely.
- One single gateway may serve several controllers, connected to it via WiFi or RS485 hard-wired line.
- An internal webserver configures the network of controllers automatically without complications for the user.
- The connection from the Gateway to the cloud takes place on 3G or NB-IOT or alternatively via Ethernet through a local router. Very high security level and ecryption are ensured at all times.
- A SIM card designed for data traffic, with GDSP technology, allows global coverage, at very low traffic costs.

Standard products

12

CONTROLLERS	Pg. 13
REFRIGERATION CONTROLLERS	Pg. 17
COMPRESSOR CONTROLLER	Pg. 34
TIMER	Pg. 35
SUPERVISORY SYSTEMS	Pg. 36
PROBES - TRANSMITTERS	Pg. 37

CONTROLLERS

AC1-2W

110 x 53 x 75 mm

Two channel universal Controller, ON/OFF or PID






Main Features

- Wall-mount controller
- Runs on mains power supply
- PID with autotuning or ON/OFF control
- Input for 0÷1V, PTC/NTC10K
- 0.1 / 1°C or 1°F resolution
- Selectable Refrigerating/Heating (Dehumidifying/Humidifying) control
- Absolute or relative temperature alarms
- ON/OFF button on front
- Connectivity to LAE TAB supervisory systems

Applications

Temperature: control of small cold stores, heating systems, bains-marie, ovens, laboratory equipment.

Humidity: control of greenhouses, seasoning cells, cold rooms, air-conditioned rooms.

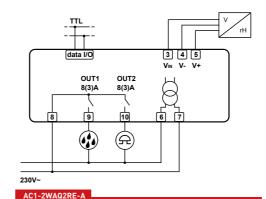

	AC1-2	AC1-2W series				
Functions		AC1-2WT	AC1-2WA			
Input type	PTC	NTC10K*	0÷1V			
Range	-50÷150°C -60÷300°F	-40÷125°C -40÷260°F	Configurable in setup			
Accuracy	±0.3°C	±0.3°C	±3mV			
Resolution	0.1 / 1°	C / 1°F	0.1 / 1			
Ambient temperature	-10÷50°C					

[a]-50÷150°C; [b] remaining range.

* The standard NTC10K is the SN4B20P1


	AC1-2W	Т	Q	2	R	Е	-B
		[1]	(2)	(3)	(4)	(5)	(6)
Pos.	Function	Descrip	tion				
(1)	Input	A = 0÷1V	; T = PTC	/ NTC10K			
(2)	Connections	Q = Detachable screw terminals					
(3)	Output No.	1 = one;	1 = one; 2 = two				
(4)	Output type	R = relay					
(5)	Supply	E = 230V	ac 50/60H:	z 50/60Hz	3 W		
(6)	Serial comm.	Nil = no;	-A = TTL;	-B = RS48	5		

How to order:

➤ AC1-2WTQ2RE-B (PTC/NTC10K input, detachable screw terminals, 2 relays, 230Vac supply voltage, RS485 port)

> AC1-2WAQ2RE-A (0÷1V input, detachable screw terminals, 2 relays, 230Vac/dc supply voltage, TTL port)

> In order to know versions available, please consult LAE or our local dealer.

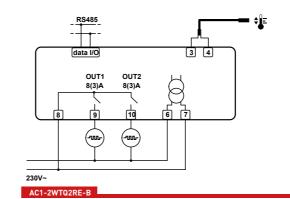

77 x 35 x 77 mm

Two channel universal Controller, ON/OFF or PID




Main features


- Runs on universal mains power supply
- PID with autotuning or ON/OFF control
- Main output on 12A relay or for SSR-piloting and auxiliary output on 5A relay
- Input for 0÷1V, 0/4÷20mA, PTC/NTC10K, TC J/K or Pt100
- 0.1 / 1°C or 1°F resolution
- Selectable Refrigerating/Heating (Dehumidifying/Humidifying) control
- Absolute or relative temperature alarms
- ON/OFF button on front
- Connectivity to LAE TAB supervisory systems


Applications

Temperature: Control of small cold stores, refrigerated cabinets and tables, heating systems, heated cupboards, bains-marie, ovens, laboratory equipment.

Humidity: Control of greenhouses, seasoning cells, cold rooms, air-conditioned rooms.

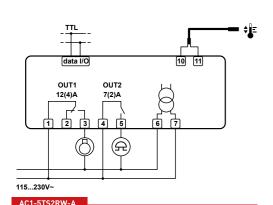

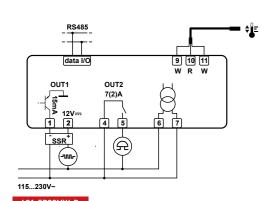

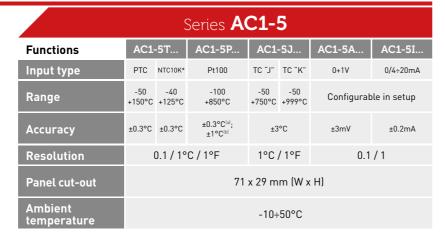

- $^{(a)}$ -50÷150°C; $^{(b)}$ remaining range
- * The standard NTC10K is the SN4B20P1

How to order:

- > AC1-5TS2RW-A (PTC/NTC10K input, screw terminals, 2 relays, 115÷230Vac supply voltage, TTL port)
- > AC1-5JS2MW-B (J/K TC input, screw terminals, output 1 on SSR drive, output 2 on relay, 115÷230Vac supply voltage, RS485 port)
- On request, the AC1-5 is also available with gasket for a better protection between bezel and panel.
- In order to know versions available, please consult LAE or our local dealer.

	AC1-5	Т	S	2	R	W	-B
		[1]	(2)	(3)	[4]	(5)	(6)
Pos.	Function	Descrip	tion				
(1)	Input	A = 0÷1V;	I = 0/4÷20m	A; J = TC 'J',	/'K'; P = Pt1	00; T = PTC/	/NTC10K
(2)	Connections	S = built	-in screw	terminals			
(3)	Output No.	1 = one; 2 = two					
(4)	Output type	R = relay	; M = Out1	on SSR, 0	ut2 on rela	ay	
(5)	Supply	D * = 12V	ac/dc; W =	= 115230	Vac 50/60H	Hz; 3 W	
(6)	Serial comm	Nil = no;	-A = TTL;	- B = RS48!	5		

* = in the version with 12Vac/dc power supply, the maximum voltage on the outputs is 50Vac/dc, in order to ensure safety insulations.

CONTROLLERS

AC1-27

71 x 97 x 61 mm DIN rail

Two channel universal Controller, ON/OFF or PID



#lae




Main features

- Runs on mains power supply
- PID with autotuning or ON/OFF control
- Main output on 12A relay or for SSRpiloting and auxiliary output on 5A relay
- Input for 0÷1V, PTC/NTC10K, TC J/K or
- 0.1 / 1°C or 1°F resolution
- Selectable Refrigerating/Heating (Dehumidifying/Humidifying) control
- Absolute or relative temperature alarms
- ON/OFF button on front
- Connectivity to LAE TAB supervisory systems

Applications

Temperature: on control panels for small cold stores, heating systems, heated cupboards, bains-marie, ovens, laboratory equipment. Humidity: on control panels for greenhouses, seasoning cells, cold rooms, air-conditioned rooms.

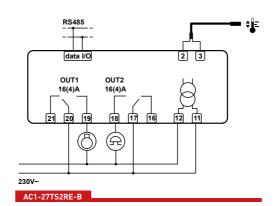

- RS485 	V
data I/O	234
OUT1 OUT2 16(4)A 16(4)A 21 20 19 18 17 16	V _N V- V+
230V~	

		AC1-27 series						
Functions	AC1-	27T	AC1-27P	AC1-	27J	AC1-27A		
Input type	PTC	NTC10K*	Pt100	TC "J"	TC "K"	0+1V		
Range		-40÷125°C -40÷260°F	-100÷850°C -150÷999°F	-50÷750°C -60÷999°F	-50÷999°C -60÷999°F	Configurable in setup		
Accuracy	±0.3°C	±0.3°C	±0.3°C ^(a) ; ±1°C ^(b)	±3°C		±3mV		
Resolution		0.1 / 1°	C / 1°F	1 °C	/°F	0.1 / 1		
Ambient temperature		-10÷50°C						

- [a]-50÷150°C; [b] remaining range.
- * The standard NTC10K is the SN4B20P1

	AC1-27	Т	S	2	R	Е	-B
		[1]	(2)	(3)	(4)	(5)	(6)
Pos.	Function	Descrip	tion				
(1)	Input	A = 0÷1V	; J = TC 'J	'/'K'; P =	Pt100; T =	= PTC / NT	C10K
(2)	Connections	S = built-in screw terminals					
(3)	Output No.	1 = one;	1 = one; 2 = two				
(4)	Output type	R = relay; M = Out1 on SSR, Out2 on relay					
(5)	Supply	D = 12Vac/dc; E = 230Vac 50/60Hz; U = 115Vac 50/60Hz 3W					
(6)	Serial comm.	Nil = no;	-A = TTL;	- B = RS48	5		

How to order:

> AC1-27JS2RE-B (TC J/K input, screw terminals, 2 relay outputs, 230Vac supply

> AC1-27AS2E-B (0÷1V input, screw terminals, 2 relay outputs, 230Vac supply voltage,

In order to know versions available, please consult LAE or our local dealer.

LTR-5

77 x 35 x 77 mm

Single output ON/OFF or PID controller



Main features

- Runs on mains power supply
- PID with autotuning or ON/OFF control
- Output on relay (16A) or SSR piloting
- Input for PTC, NTC10K or 0÷1V
 0.1 / 1°C or 1°F resolution
- Refrigerating (dehumidifying) or heating (humidifying) control mode selection
- ON/OFF button on front
- Connectivity LAE supervisory systems

Applications

Temperature: Control of small cold stores, refrigerated cabinets and tables, heating systems, heated cupboards, bains-marie, ovens, laboratory equipment.

Humidity: Control of greenhouses, seasoning cells, cold rooms, air-conditioned rooms.

	Series LTR-5					
Functions	LTR-5T	LTR-5C	LTR-5A			
Input type	PTC	NTC10K	0÷1V			
Range	-50÷150°C -60÷300°F	-40÷125°C -40÷260°F	0÷99.9% r.H.			
Accuracy	$\pm 0.3^{\circ}C^{(a)}; \qquad \pm 0.3^{\circ}C^{(b)}; \\ \pm 1.0^{\circ}C^{(c)} \qquad \pm 1.0^{\circ}C^{(c)}$		±0.7% r.H.			
Resolution	0.1 / 1°C, °F					
Front protection	IP55					
Panel cut-out	71 x 29 mm (W x H)					
Ambient temperature	-10÷50°C					

(a) -50÷140°C; (b) -40÷110°C; (c) remaining range.

	LTR-5	С	S	R		Ε	-B	
		[1]	(2)	(3)		(4)	(5)	
Pos.	Function	Descripti	on					
(1)	Input	T = PTC; C	** = NTC1	0K; A = 0	÷1V			
(2)	Connectors	S = screw t	erminals					
(4)	Output type	R = relay; F	= SSR dr	ive				
(5)	Supply	D = 12Vac/	dc; E = 23)Vac, U =	115Va	c, 2 W		
(6)	Serial comm.	- = no seria	al port; -A	= TTL; - [3 = RS	485		


** The standard NTC probe is the SN4B20P1

How to order examples:

- > LTR-5CSFE-B (NTC10K input, 1 SSR drive output, screw terminals, 230Vac supply, RS485 port)
- > LTR-5ASRE (0÷1V input, 1 relay, screw terminals, 230Vac supply, no serial port)

> On request, the LTR-5 is also available with gasket for a better protection between

In order to know more options available for the models, please consult LAE or our local dealer.

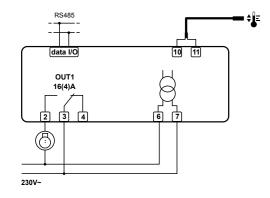

REFRIGERATION CONTROLLERS

AD2-5

77 x 35 x 90 mm

Universal Refrigeration Controller





Main features

- Defrosts at regular intervals
- Optional synchronized defrost start and termination with master-slave connection
- Selectable NTC10K or PTC input
- Universal 115-230Vac power supply
- FLEXICOLD function for energy saving or alternative setpoint
- Optional control of a second compressor or evaporator
- Excellent evaporator fan control
- Temperature, door open, condenser high temperature/pressure alarms
- Light and standby control (On/Off)
- Connectivity to LAE supervisory systems

Applications

Plug-in cabinets, supermarket display cases, cold stores, control panels, upright fridges and freezers, refrigerated tables.

	AD2-	•5 series		
Functions		B03W-BG	C14W-AG	C34W-BG
	Thermostat	•	•	•
Temperature inputs	Evaporator	•	•	•
mpats	Auxiliary		•	•
Door switch input	Voltage free contact	•	•	•
	Voltage free contact		•	
Digital	12,24Vac voltage			
inputs	Defrost synchronisation			•
	Thermostat	•	•	•
Outputs	Evaporator fans	•	•	•
Outputs	Defrost	•	•	•
	Auxiliary		•	•
Dower supply	115-230Vac	•	•	•
Power supply	12Vac/dc			
Canial mant	TTL serial port		•	
Serial port	RS-485 serial port	•		•
Koynad	Generic	•	•	•
Keypad	With light button			

- > All models come with an alarm buzzer.
- > All models are fitted with detachable screw terminals.
- $\ensuremath{\boldsymbol{\mathsf{\mathcal{Y}}}}$ On request, the AD2-5 is also available with gasket for a better protection between bezel and metal panel.
-) In order to know more options available for the models, please consult LAE or our

RS485	Def sync ####################################
(data I/O)	17 [18] [19] [21] [20] [23] [22] [24] DI2 Door T1 T2 T3
	취는 등 됨 AUX 12(5)A 8(3)A 7(2)A 7(2)A
561	4 2 3 7 8
115230Vac	

	Technical Data	
Control Range	-50÷120°C, -55÷240°F	
Resolution	0.1 / 1 °C; °F	
Accuracy	NTC10K: <±0.3°C (-40.0÷70.0°C) PTC1000: <±0.5°C (-50÷120°C)	
Sensor type	Selectable NTC10K standard mod. SN4B20P1/P2/P3 or PTC1000	
Power supply	115÷230V~ ±10% 50÷60Hz 3W	
Front protection	IP55	
Panel cut-out	71 x 29 mm (W x H)	
Ambient temperature	-10÷50°C	

BR5

77 x 35 x 90 mm

Compact Comprehensive Refrigeration Controller







Main features


- Up to 5 configurable outputs for a perfect adaptation to the specific needs such as: control of variable speed compressors (example 2) or fans (example 1), drive of a large external compressor relay (example 3), control of lights, ON/OFF fans, heaters, switched loads, defrost, alarms, second evaporator
- With or without RTC for timed control functions
- Suitable for R290 compressors
- Universal mains power supply
- Connectivity to residential supervisory systems or Cloud
- Several display colour options: amber, blue, green, red or white

Applications

Upright refrigerators, plug-in and supermarket display cases, refrigerated vehicles, cold stores, control panels.

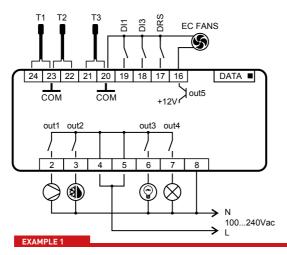

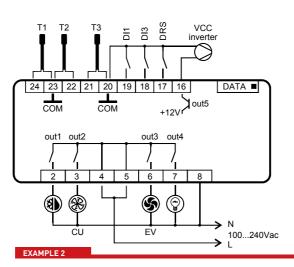

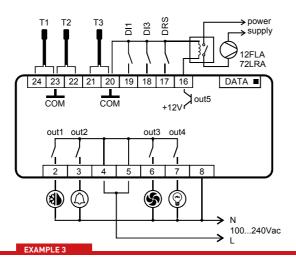



BR5 series					
Functions			-A001WR	-B001WR	-A101WT
Output OUTS	-A	For ECM fans	•		•
Output OUT5	-В	For VCC		•	
RTC	0	Fitted	•	•	
RIC	1	None			•
Inputs/Outputs	01	Standard version: 6 inputs, 4 outputs	•	•	•
Power Switch	W	100240Vac	•	•	•
	R	RS485	•	•	
Serial	Т	TTL			•
communication	F	WiFi (external module)			
Aesthetical options and F/W	-	None			

> All models are fitted with buzzer.

	Technical Data
Range	-50÷110°C, -58÷180°F
Resolution	0.1 / 1°C; °F
Precision	<±0.5°C within the measurement range
Sensor type	NTC 10KΩ@25°C
Relay output max loads (240Vac):	

resistive 3.5 FLA; 21 LRA
esistive 1 FLA; 4 LRA
esistive 1 FLA; 4 LRA
esistive 1 FLA; 4 LRA
/ 90mA@12Vdc
240Vac ±10% 50÷60Hz 3W
50°C
years

AD2-28

107 x 95 x 47 mm

Versatile Split Refrigeration Controller



Main features


- Cyclic defrosts
- Synchronized defrost start and termination with master-slave connection
- Selectable NTC10K or PTC input
- FLEXICOLD function for energy saving or alternative setpoint
- Optional control of a second compressor or evaporator
- Excellent evaporator fan control
- Absolute or relative temperature alarms, door open alarm, condenser high temperature/pressure alarm
- Light and standby control (On/Off)
- Connection to LAE supervisory systems
- Available display unit: LCD-5S or RU33

Applications

Upright refrigerators, plug-in and supermarket display cases, cold stores, control panels.

	AD2-2	28 series		
Functions		B1T5E-A	C1S4E-A	C1S5E-B
	Thermostat	•	•	•
Temperature inputs	Evaporator	•	•	•
	Auxiliary		•	•
Door switch	Voltage free	•	•	•
	Voltage free	•	•	•
Digital	12÷24Vac			
input aux.DI2	Defrost synchronisation			
Cammaakiama	Quick on M/F			
Connections	On screw terminals	•	•	•
Dienlave	LCD-5S		•	•
Displays	RU33	•		
	Thermostat	•	•	•
	Evaporator fans	•	•	•
Outputs	Defrost	•	•	•
	Auxiliary 1	•	•	•
	Auxiliary 2	•		•
Power supply	230Vac	•	•	•
Serial port	TTL	•	•	
	RS-485			•
	24			

- > All models come with an alarm buzzer.
- $\ensuremath{\boldsymbol{\mathsf{J}}}$ In order to know more options available for the models, please consult LAE or our local dealer.

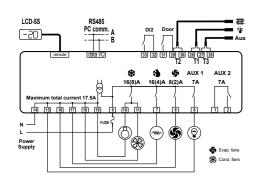

	Technical data		
Range	-50120°C, -55240°F		
Resolution	0.1 / 1 °C; °F		
Precision	NTC10K: <±0.3°C (-40.0÷70.0°C) PTC1000: <±0.5°C (-50÷120°C)		
Sensor type	Selectable NTC10K standard mod. SN4B20P1/P2/P3 or PTC1000		
Power supply	230V~ ±10% 50÷60Hz 3W		
Ambient temperature	-10÷50°C		





Techni	ical data LCD-5S display unit
Dimensions	77 x 35 x 20 mm (WxHxD)
Panel cut-out	71 x 29 mm (WxH)
Front protection	IP55
Ambient temperature	-10÷50°C



Technical data RU33 display unit		
imensions	169 x 38 x 25 mm (WxHxD)	
anel cut-out	163 x 31.5 mm (WxH)	
ront protection	IP55	
mbient temperature	-10÷50°C	

AR2-28

107 x 95 x 47 mm

Versatile Split Refrigeration Controller with RTC



Main features


- Up to six real time defrosts
- Synchronized defrost start and termination with master-slave connection
- Selectable NTC10K or PTC input
- FLEXICOLD function for energy saving or alternative setpoint
- Optional control of a second compressor or evaporator
- Excellent evaporator fan control
- Absolute or relative temperature alarms, door open alarm, condenser high temperature/pressure alarm
- Light and standby control (On/Off)
- Connection to LAE supervisory systems
- Available display unit: LCD-5S or RU33

Applications

Plug-in cabinets, supermarket display cases, cold stores, control panels, upright fridges and freezers, refrigerated tables and all those applications where real time defrost is required.

	AR2-2	28 series		
Functions		B1T5E-A	C1S4E-A	C1S5E-B
	Thermostat	•	•	•
Temperature inputs	Evaporator	•	•	•
	Auxiliary		•	•
Door switch	Voltage free	•	•	•
	Voltage free	•	•	•
Digital	12÷24Vac			
input aux.DI2	Defrost synchronisation			
Connections	Quick on M/F			
Connections	On screw terminals	•	•	•
Dieplays	LCD-5S		•	•
Displays	RU33	•		
	Thermostat	•	•	•
	Evaporator fans	•	•	•
Outputs	Defrost	•	•	•
	Auxiliary 1	•	•	•
	Auxiliary 2	•		•
Power supply	230Vac	•	•	•
Carial part	TTL	•	•	
Serial port	RS-485			•

- > All models come with an alarm buzzer.
- $\ensuremath{\textbf{>}}$ In order to know more options available for the models, please consult LAE or our local dealer.

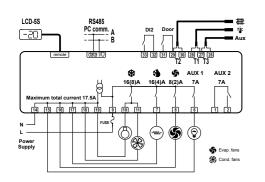

	Technical data		
Range	-50120°C, -55240°F		
Resolution	0.1 / 1 °C; °F		
Precision	NTC10K: <±0.3°C (-40.0÷70.0°C) PTC1000: <±0.5°C (-50÷120°C)		
Sensor type	Selectable NTC10K standard mod. SN4B20P1/P2/P3 or PTC1000		
Power supply	230V~ ±10% 50÷60Hz 3W		
Ambient temperature	-10÷50°C		





Technica	l data LCD-5S display unit
Dimensions	77 x 35 x 20 mm (WxHxD)
Panel cut-out	71 x 29 mm (WxH)
Front protection	IP55
Ambient temperature	-10÷50°C



Technical data RU33 display unit		
mensions	169 x 38 x 25 mm (WxHxD)	
nel cut-out	163 x 31.5 mm (WxH)	
ont protection	IP55	
mbient temperature	-10÷50°C	

 \sim 22

77 x 35 x 90 mm

Controller for transport refrigeration



Main features

- Refrigeration and heating controller with neutral band
- Selectable NTC10K or PTC input
- Universal 110-230Vac power supply
- FLEXICOLD function for energy saving or alternative setpoint
- Optional control of a second compressor or evaporator
- Excellent evaporator fan control
- Temperature, door open, condenser high temperature/pressure alarms
- Light and standby control (On/Off)
- Connectivity to LAE supervisory systems

Applications

Refrigerated vehicles, plug-in cabinets, refrigerated display cases, control panels.

AH1-5 series				
Functions		B14L-AG	B14W-AG	C24W-BL
	Thermostat	•	•	•
Temperature Inputs	Evaporator	•	•	•
	Auxiliary			•
Door switch input	Voltage free contact	•	•	•
Digital inputs	Voltage free contact	•	•	
Digital inputs	12÷24Vac voltage			•
	Thermostat	•	•	•
Outputs	Evaporator fans	•	•	•
Outputs	Defrost	•	•	•
	Auxiliary	•	•	•
Power supply	115-230Vac		•	•
Power supply	7-30Vdc	•		
Serial port	TTL serial port	•	•	
	RS-485 serial port			•
Koypad	Generic	•	•	
Keypad	With light button			•

- > All models come with an alarm buzzer.
- ${\bf \boldsymbol{\lambda}}$ All models are fitted with detachable screw terminals.
- **>** On request, the AH1-5 is also available with gasket for a better protection between bezel and metal panel.
- > In order to know more options available for the models, please consult LAE or our local dealer.

data I/O	I	**
9 6 3 4 5 1 5 4 5 1 5 1 5 1 5 1 5 1 5 1 5 1 5	10A 1A	
730Vdc	\$ 5	

	Technical Data
Control range	-50÷120°C, -55÷240°F
Resolution	0.1 / 1 °C; °F
Accuracy	NTC10K: <±0.3°C (-40.0÷70.0°C) PTC1000: <±0.5°C (-50÷120°C)
Sensor type	Selectable NTC10K standard mod. SN4B20P1/P2/P3 or PTC1000
Power supply	115-230V~ ±10% 50÷60Hz 3W
Front protection	IP55
Panel cut-out	71 x 29 mm (WxH)
Ambient temperature	-10÷50°C

REFRIGERATION CONTROLLERS

AR2-5

77 x 35 x 90 mm

Universal Refrigeration Controller with RTC



#lae

Main features

- Up to six real time defrosts
- Synchronized defrost start and termination with master-slave connection
- Selectable NTC10K or PTC input
- Universal 110-230Vac power supply
- FLEXICOLD function for energy saving or alternative setpoint
- Optional control of a second compressor or evaporator
- Excellent evaporator fan control
- Temperature, door open, condenser high temperature/pressure alarms
- Light and standby control (On/Off)
- Connectivity to LAE supervisory systems

Applications

Plug-in cabinets, supermarket display cases, cold stores, control panels, upright fridges and freezers, refrigerated tables.

	AR2-	·5 series		
Functions		C14D-BG	B24W-BG	C34W-BG
	Thermostat	•	•	•
Temperature inputs	Evaporator	•	•	•
mputs	Auxiliary	•		•
Door switch input	Voltage free contact	•	•	•
	Voltage free contact	•		
Digital	12÷24Vac voltage		•	
inputs	Defrost synchronisation			•
	Thermostat	•	•	•
Outrote	Evaporator fans	•	•	•
Outputs	Defrost	•	•	•
	Auxiliary	•	•	•
Dower cumply	115÷230Vac		•	•
Power supply	12Vac/dc	•		
Serial port	TTL serial port			
	RS-485 serial port	•	•	•
Koypad	Generic	•	•	•
Keypad	With light button			

- All models come with an alarm buzzer.
- **>** All models are fitted with detachable screw terminals.
- $oldsymbol{\mathfrak{I}}$ On request, the AR2-5 is also available with gasket for a better protection between bezel and metal panel.
- $\ensuremath{\textbf{>}}$ In order to know more options available for the models, please consult LAE or our local dealer.

RS485	Def sync	## ## Aux
data I/O	[17] [18] [19] [21] [20] DI2 Door T1	T2 T3
	왕는 등 왕 12(5)A 8(3)A 7(2)A	AUX 7(2)A
5 6 1	4 2 3	7 8
115230Vac	YYY	

	Technical Data
Control Range	-50÷120°C, -55÷240°F
Resolution	0.1 / 1 °C; °F
Accuracy	NTC10K: <±0.3°C (-40.0÷70.0°C) PTC1000: <±0.5°C (-50÷120°C)
Sensor type	Selectable NTC10K standard mod. SN4B20P1/P2/P3 or PTC1000
Power supply	115÷230V~ ±10% 50÷60Hz 3W
Back-up battery	>150 hours
Front protection	IP55
Panel cut-out	71 x 29 mm (WxH)
Ambient temperature	-10÷50°C

 $\mathbf{4}$




Main Features

- Selectable Refrigerating or Heating control
- Integrated defrost functions
- Runs on mains power supply
- Direct compressor control through high power 16(4)A or 16(8)A relay
- Selectable NTC10K or PTC probe input
- Auxiliary output configurable in four different operation modes
- Temperature, door open alarms
- Optional light control button
- Connectivity to LAE supervisory systems
- UL approved

Applications

Freestanding upright cabinets and counters, cold stores, plug-in display cases, control panels, heated cabinets.

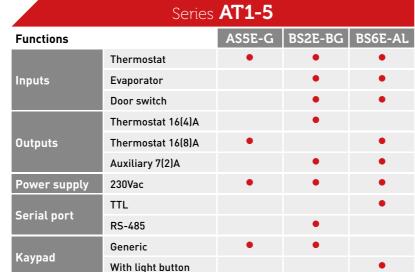

- **>** Models with removable screw terminal blocks are available. In this case, the letter
- **>** Versions with 110V power supply are available.
- ➤ On request, the AT1-5 is also available with gasket for a better protection between bezel and metal panel.
- local dealer.

Functions		AS5E-G	BS2E-BG	BS6E-AL
	Thermostat	•	•	•
Inputs	Evaporator		•	•
	Door switch		•	•
	Thermostat 16(4)A		•	
Outputs	Thermostat 16(8)A	•		•
	Auxiliary 7(2)A		•	•
Power supply	230Vac	•	•	•
Carial part	TTL			•
Serial port	RS-485		•	
Kaumad	Generic	•	•	
Kaypad	With light button			•

"S" of code changes in "Q", ex. AT1-5BQ2E-BG.

- > All models come with an alarm buzzer.

-) In order to know more options available for the models, please consult LAE or our

Technical Data -50÷120°C Control range 0.1 / 1 °C; °F Resolution NTC10K: <±0.3°C (-40.0÷70.0°C) Accuracy PTC1000: <±0.5°C (-50÷120°C) selectable NTC10K standard mod. SN4B20P1/P2 Sensor type or PTC1000 230V~ ±10% 50÷60Hz 3W Power supply Front protection IP55 Panel cut-out 71 x 29 mm (WxH) Ambient -10÷50°C temperature



AT2-5

77 x 35 x 77 mm

Refrigeration Controller for HT/LT





Main Features


- Selectable Refrigerating or Heating control
- Runs on mains power supply
- Direct compressor control through high power 16(5)A
- Auxiliary output configurable in six different operating modes
- Selectable NTC10K or PTC input
- Electrical, off cycle or hot gas defrost
- Temperature, door open alarms
- Optional light control button
- Connectivity to LAE supervisory systems
- UL approved

Applications

High or Low Temperature upright cabinets and counters, cold stores, plug-in display cases, control panels, heated cabinets.

	Series AT2-5			
Functions		BS4E-G	BS4E-AL	BS4E-BG
	Thermostat	•	•	•
Inputs	Evaporator	•	•	•
	Door switch	•	•	•
	Thermostat	•	•	•
Outputs	Evaporator fans	•	•	•
	Auxiliary	•	•	•
Power supply	230Vac	•	•	•
Carial part	Serial port TTL		•	
Serial port	Serial port RS-485			•
Kaypad	Generic	•		•
	With light button		•	

- > Models with removable screw terminal blocks are available. In this case, the letter "S" of code changes in "Q", ex. AT2-5BQ4E-AL.
- All models come with an alarm buzzer.
- > Versions with 110V power supply are available.
- ➤ On request, the AT2-5 is also available with gasket for a better protection between bezel and metal panel.
-) In order to know more options available for the models, please consult LAE or our local dealer.



	Technical Data	
Control Range	-50÷120°C	
Resolution	0.1 / 1 °C; °F	
Accuracy	NTC10K: <±0.3°C (-40.0÷70.0°C) PTC1000: <±0.5°C (-50÷120°C)	
Sensor type	Selectable NTC10K standard mod. SN4B20P1/P2 or PTC1000	
Power supply	230V~ ±10% 50÷60Hz 3W	
Front protection	IP55	
Panel cut-out	71 x 29 mm (WxH)	
Ambient temperature	-10÷50°C	

BD1-28

107 x 95 x 47 mm

Split Comprehensive Refrigeration Controller



Main features

- Refrigeration controller with cyclic defrosts
- Enhanced ECO Energy Saving management
- Optional compressor variable speed control
- Suitable for R290
- Up to 2 auxiliary configurable outputs (Light, switched loads, second evaporator etc.)
- Universal mains power supply
- Connectivity to hard-wired supervisory systems
- Many display options: coloured LED's with DU5S, capacitive touch TU5S or high contrast LCD, fully customised

Applications

Upright refrigerators, plug-in and supermarket display cases, cold stores, control panels.

	001	28 series		
Functions		B0Q3W-A	C1S4WH-B	C1S5W-B
	Thermostat	•	•	•
Temperature inputs	Evaporator	•	•	•
·	Auxiliary		•	•
DI1, DI2 digital inputs	Voltage free contact	•	•	•
DI3 aux. digital input	Voltage free contact/ defrost synchronization		•	•
	Thermostat	•	•	•
	Evaporator fans	•	•	•
Outputs	Defrost	•	•	•
	Auxiliary 1		•	•
	Auxiliary 2			•
Commodians	Quick with M/F connectors	•		
Connections	Screw terminals		•	•
Power supply	100÷240Vac	•	•	•
R290 option			•	
Aux functions	TTL serial port	•		
	RS485 serial port		•	•

- > All models come with an alarm buzzer.
-) In order to know more options available, please consult LAE or our local dealer.

FUSE 26A L N Power supply 100.240 Vbc
12 4 5 6 7 8 9 10 11 13 19 RS485 AUX 2 AUX 1 3 4 AC NEUTRAL 7A 7A 16(4)A 16(4)A 16(12)A DC
20 21 22 22 24 25 26 27 28 Remote display DI

	Technical Data
Range	-50÷110°C, -58÷180°F
Resolution	0.1 / 1 °C; °F
Precision	<±0.5°C within the measurement range
Sensor type	Mod. standard SN4B20P1/P2/P3
Power supply	100÷240Vac ±10% 50÷60Hz 3W
Ambient temperature	-10÷50°C

REFRIGERATION CONTROLLERS

BR1-28

107 x 95 x 47 mm

Clever Split Refrigeration Controller with RTC



#lae

Main features


- Up to six real time defrosts per day
- Enhanced ECO Energy Saving management
- Optional compressor variable speed control
- Suitable for R290
- Up to 2 auxiliary configurable outputs (Light, switched loads, second evaporator etc.)
- Universal mains power supply
- Connectivity to hard-wired supervisory systems
- Many display options: coloured LED's with DU5S, capacitive touch TU5S or high contrast LCD, fully customised
- UL approved

Applications

Upright refrigerators, plug-in and supermarket display cases, cold stores, control panels.

BR1-28 series				
Functions		B0Q3W-A	C1S4WH-B	C1S5W-B
	Thermostat	•	•	•
Temperature inputs	Evaporator	•	•	•
	Auxiliary		•	•
DI1, DI2 digital inputs	Voltage free contact	•	•	•
DI3 aux. digital input	Voltage free contact/ defrost synchronization		•	•
	Thermostat	•	•	•
	Evaporator fans	•	•	•
Outputs	Defrost	•	•	•
	Auxiliary 1		•	•
	Auxiliary 2			•
Connections	Quick with M/F connectors	•		
Connections	Screw terminals		•	•
Power supply	100÷240Vac	•	•	•
	7÷30Vdc			
R290 option			•	
Aux functions	TTL serial port	•		
Aux functions	RS485 serial port		•	•

- **>** All models come with an alarm buzzer.
- In order to know more options available, please consult LAE or our local dealer.

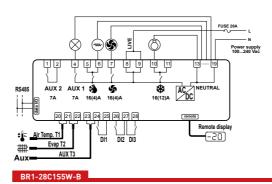

	Technical Data
Range	-50÷110°C, -58÷180°F
Resolution	0.1 / 1 °C; °F
Precision	$<\pm 0.5^{\circ}\text{C}$ within the measurement range
Sensor type	NTC10, standard mod. SN4B20P1/P2/P3
Power supply	100÷240Vac ±10% 50÷60Hz 3W
Ambient temperature	-10÷50°C

BD1-28C1S5W-E

BR1-27

71 x 97 x 61 mm DIN rail

Clever Split Refrigeration Controller with RTC



Main features

- Up to six real time defrosts per day
- Enhanced ECO Energy Saving management
- Defrost synchronisation between two or more controllers
- Up to 2 auxiliary configurable outputs (Light, switched loads, second evaporator etc.)
- Universal mains power supply
- Connectivity to hard-wired supervisory systems, or wireless option

Applications

Cold stores, control panels.

BR1-27 senes		
Functions		C1S5W-B
	Thermostat	•
Temperature inputs	Evaporator	•
	Auxiliary	•
DI1, DI2 digital inputs	Voltage free contact / Defrost synchronisation	•
	Thermostat	•
	Evaporator fans	•
Outputs	Defrost	•
	Auxiliary 1	•
	Auxiliary 2	•
Connections	Screw terminals	•
Power supply	100÷240Vac	•
Aux. functions	RS485 serial port	•

RD1_27

- > All models come with an alarm buzzer.
- $\boldsymbol{\mathsf{y}}$ In order to know more options available, please consult LAE or our local dealer.

	Technical Data
Range	-50÷110°C, -58÷180°F
Resolution	0.1 / 1 °C; °F
Precision	<±0.5°C within the measurement range
Sensor type	NTC10K mod. standard SN4B20P1/P2/P3
Power supply	100÷240Vac ±10% 50÷60Hz 3W
Ambient temperature	-10÷50°C

REFRIGERATION CONTROLLERS

BIT25

86 x 82 x 44 mm

Split HT/LT Refrigeration Controller



#lae

Main features


- Three highly rated relay outputsConfigurable control of Aux 1
- and Aux 2 outputsAlternate set of parameters for energy saving
- Management of multiple alarms
- Option of setpoint adjustment via a potentiometer, no display
- Standby button (On/Off)
- Universal power supply 100-240V
- Suitable for R290
- Connection to LAE supervisory systems
- UL approved

Applications

Upright refrigerators, bottle coolers, plug-in display cases for shops and supermarkets, cold stores, control panels.

BIT25 series				
Functions		BS1E-A	B1S2E-A	B1S3WH-B
Temperature	Thermostat	•	•	•
inputs	Evaporator	•	•	•
Digital	DI1 digital input	•	•	•
inputs	DI2 digital input	•	•	•
	Thermostat	•	•	•
Outputs	Auxiliary 1		•	•
	Auxiliary 2			•
R290 option				•
	230Vac	•	•	
Power supply	115Vac			
	100÷240Vac			•
Serial port	TTL	•	•	
	RS-485			•

- ▶ All models come with an alarm buzzer and DI1 digital input.
- > In order to know more about versions available for the models, please consult LAE or our local dealer.

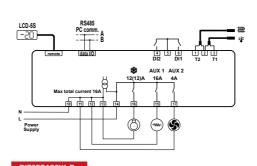

	Technical Data
Range	-50110°C, -58180°F
Resolution	0.1 / 1 °C; °F
Precision	<±0.5°C within the measurement range
Sensor type	NTC10K mod. standard SN4B20P1/P2
Power supply	115Vac, 230Vac or universal 100240Vac ±10% 50÷60Hz 3W
Ambient temperature	-10÷50°C

L	LCD-5S display unit	
Dimensions	77 x 35 x 20 mm (WxHxD)	
Panel cut-out	71 x 29 mm (WxH)	
Front protection	IP55	

DISPLAYS

Displays for BD / BR1-28









TU5	S Blue LED capacitive touch display unit
Dimensions	77 x 35 x 13 mm (W x H x D)
Panel cut-out	71 x 29 mm (W x H)
Panel thickness	0.9 to 1.2 mm
Front protection	IP55
Ambient temperature	-10÷50°C

	DU00 High contrast LCD display
Dimensions	78 x 64 x 15 mm (W x H x D)
Panel cut-out	57 x 60 mm (W x H)
Front protection with external overlay	IP67
Ambient temperature	-10÷50°C

Model	Features
DU5S	Red LEDs
DU5S-AMB	Amber LEDs
DU5S-BLU	Blue LEDs
DU00-02	With buzzer
DU00-03	Without buzzer
TU5S-BLU	Blue LEDs

 $\ensuremath{\textbf{>}}$ In order to know MOQ per model and options available, please consult LAE or our local dealer.

REFRIGERATION CONTROLLERS

LCD32

196 x 38 x 78 mm

Compact multi-function refrigeration controller



#lae

Main features


- Panel thermostat for High and Low Temperature
- Runs on mains power supply
- Evaporator fan control
- Electrical, hot gas or off cycle defrost
- Light or auxiliary load control
- Quick connectors for Lives and
- Neutrals
 Two operating parameter sets
- Door open, high/low temperature, HP alarms
- Automatic condenser clean warning
- Connection to LAE supervisory systems

Applications

Cold stores, refrigerating cabinets, tables and counters, saladettes, medical cabinets and display cases, both static and ventilated.

LCD32 series			
Functions Q4E-C S4E-C			S4E-C
Connections		Quick	Screw terminals
Innuta	Thermostat	•	•
Inputs	Evaporator	•	•
Outputs	Thermostat	•	•
	Defrost	•	•
	Evaporator fans	•	•
	Auxiliary	•	•
	Door switch + aux.	•	•
Options	TTL serial port		
	RS485 serial port	•	•
Power supply	230Vac	•	•

- On request the LCD32 is also available with gasket for a better protection between bezel and metal panel. In this case, the code changes in, for ex. LCD32Q4E-CS. Please ask information about standard versions available with this option.
- In order to know versions available, please consult LAE or our local dealer.



	Technical Data
Programming Range	-30.0÷30.0°C
Resolution	0.1/1; °C/°F
Accuracy	<±0.2°C (-30.0÷30.0°C)
Sensor type	NTC, standard mod. SN2B20P1/P2
Power supply	230Vac ±10%; 50/60Hz; 3W
Front protection	IP55
Panel cut-out	163 x 31.5 mm
Ambient temperature	-10÷50°C

MS-27

71 x 97 x 61 mm DIN Rail

Multi-compressor or multi-fan controller



Main features

- Four ON/OFF outputs for the control of single or multi-stage compressors or fans.
- Proportional output for speed control (inverters).
- Output with change-over contacts for alarm control.
- Input for pressure transmitter (0/4...20mA) or for a temperature probe
- Two digital inputs on voltage free contact for programmable function, up to three digital optocoupled voltage inputs for a complete system diagnostics.
- Selection of the control algorithm: rotation of outputs, sequential activation, optimisation of the available power.
- Pressure Temperature conversion according to gas used.
- Storage of the latest nine alarms.
- Automatic maintenance management.
- Connectivity to LAE supervisory systems.

Applictions

For cryogenerators in supermarkets, cold stores and all cryogenic systems with variable demand.

Technical data			
	type	0/420mA (LAE PGT35)	
Pressure	range	-1.045.0bar	
input	resolution	0.1bar	
	accuracy	±0.2bar	
	type	NTC10K (LAE SN4)	
Temperature	range	-50.0120.0°C	
input	resolution	0.5°C	
	accuracy	±0.5°C	
Davis n avender	MS27E	230Vac±10%, 50/60Hz, 3W	
Power supply	MS27U	115Vac±10%, 50/60Hz, 3W	
Dolovovskovsko	0UT10UT4	5(1)A	
Relay outputs	Alarm	7(2)A	
Front protection	IP55		
Ambient temperature	-10÷50°C		



TIMER

TMR15

77 x 35 x 77 mm

Countdown timer



#lae

Main features


- Panel moun timer
- Countdown in hours and minutes or minutes and seconds
- Manual start/stop of countdown
- Remote start of countdown
- Manual switching on/off of output
- Mains powered
- Buzzer to warn countdown end
- Keypad lock

Applications

Control of duration of industrial processes, control of dough retarders, control of cooking time in ovens

	TMR15 series	
Standard versions	Power supply	Buzzer
ΓMR15E	230Vac ±10%, 3W	
ΓMR15E-A	230Vac ±10%, 3W	•
TMR15D-A	12Vac/dc ±10%, 3W	•

	Technical Data
Outputs	Out 16(4)A 240V~
Power supply	230Vac ±10% 3W
Front protection	IP55
Panel cut-out	71 x 29 mm (WxH)
Ambient temperature	-10÷50°C



TAB 5.0

Monitoring, Logging and Programming Software







Main Features

- Overall plant monitoring
- Storage of temperature, humidity, pressure, alarms
- Display and printing in numerical and graphic form of stored data
- Export of stored data for Excel* or other spread sheets
- Diagnostics with dynamic graphs of all analog and digital inputs
- Virtual instrument for analysing the system and setting regulator parameters
- Direct sending of emails and SMS relating to the alarm state
- Connection to remote PC for teleservicing via Internet
- Languages available: English, German, Italian, Polish.

Available options

Available as full optional as described above but also in a "low cost version" for data logging only.


This version is called TAB LV

Applications

Supervision of the refrigeration process in supermarkets, convenience stores, shops, petrol stations, large kitchens, food factories, cruise ships etc.

System Requirements

- ➤ Computer with Windows 7/8/10 operating system installed and properly running, minimum processor and memory as required from Windows version USB port Mouse
- ➤ 1024x768 pixel screen resolution
- ▶ 10GB available on Hard Disk
- > RS232 serial port (COM) required if a GSM modem is fitted
- ➤ USB to RS-485 converter mod. USB485-STIXL. Up to 200 controllers connectable. Every 62 controllers, you must add a repeater ATC-109N

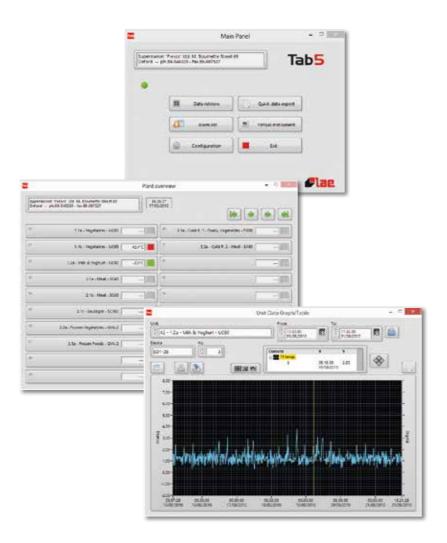

PROBES TRANSMITTERS

HT2WAD

Humidity transmitters



#lae

	Technical data
Sensor type	capacitive
Output signal	0÷1Vdc
Range	0%÷100% r.H.
Accuracy	±5% r.H. (25%÷75% r.H.)
Sheath	Ø14 x 40 mm
Protection	IP65 (electronics)
Operating temperature	0÷75°C (sensor) / 0÷50°C (electronics)
Dimensions of the enclosure	110 x 53 x 75 mm (electronics)
Power supply	12Vdc, 0.2W

PROBES TRANSMITTERS

PGT35

Pressure Transmitter



Technical data		
Sensor type	Piezoresistive gauge	
Output	4÷20mA	
Range	-0.5÷35.0 bar	
Accuracy	max±1%FS (0÷50°C)	
Sheath Ø 17 x 58 mm		
Connections mPm connector		
Pressure port	7/16"-20UNF male, steel AISI 316L	
Protection	IP65	
Ambient temperature	-40÷100°C	
Power supply	8÷32Vdc	

NTC2K & NTC10K

Temperature probes

	SN2BxxPx
Sensor type	NTC2K, 2000Ω @ 25°C
Range	-40÷120°C
Accuracy	±0.3°C @ 25°C
Sheath	Ø 6 x 29 mm; TPE
Cable	2 wires x 0.35 mm²; -40÷120°C; TPE; loose leads
Protection	IP67

SN2B50P1 5 m

1.5 m

2 m

2.5 m

3 m

Standard Versions SN2B15P1, P2

SN2B20P1, P2

SN2B25P1, P2

SN4BxxP2-B

SN2B30P1, P2, P3

TO STATE OF THE PERSON NAMED IN COLUMN TO STATE OF THE PE

SN2B / SN4BxxP1, P2

	SN4BxxPx
Sensor type	NTC10K, 10000Ω @ 25°C
Range	-40÷120°C
Accuracy	±0.3°C @ 25°C
Sheath	Ø 6 x 29 mm; TPE
Cable	2 wires x 0.35 mm²; -40÷120°C; TPE; loose leads
Protection	IP67

SN4BxxP3-Y

Standard Versions			
SN4B10P1	1 m		
SN4B15P1, P2	1.5 m		
SN4B20P1, P2	2 m		
SN4B25P1, P2	2.5 m		
SN4B30P1, P2	3 m		
SN435P1, P2	3.5 m		
SN4B40P1	4 m		
SN4B50P1, P2	5 m		
SN4B70P1	7 m		

SN4BxxP4-S

PROBES TRANSMITTERS

PTC1000



Temperature probes

QT1KxxP1/P2		
Sensor type	KTY82-121, 1000 0hm @ 25°C	
Range	-40÷120°C	
Precision	±1.5°C @ 25°C	
Tube	Ø 6 x 20 mm; AISI 304 steel	
Cable	2 wires x 0.25 mm²; thermoplastic rubber flat cable 1.65mm x 3.60mm; loose leads	
Protection	IP67	

Standard versions			
QT1K20P1, P2	2 m		
QT1K30P1, P2	3 m		
QT1K35P1	3.5 m		
QT1K40P1	4 m		
QT1K50P1, P2	5 m		

	QT1KxxP-X	
Sensor type	KTY82-121, 1000 0hm @ 25°C	
Range	-40÷120°C	
Accuracy	±1.5°C @ 25°C	
Tube	Ø 6 x 40 mm; AISI 304 steel	
Cable	2 wires x 0.25 mm 2 ; thermoplastic rubber flat cable 1.65mm x 3.60mm; loose leads	
Protection	IP67	

Standard versions		
QT1K20P-X	2 m	
QT1K30P-X	3 m	
QT1K50P-X	5 m	

MOQ: 10 pieces

	QT1KxxC 1/C2/C3
Sensor type	KTY82-121, 1000 0hm @ 25°C
Range	-40÷120°C
Precision	±1.5°C @ 25°C
Tube	Ø 6 x 20 mm; AISI 304 steel
Cable	2 wires x 0.25 mm²; thermoplastic rubber flat cable 1.65mm x 3.60mm; connectors
Protection	IP67

Standard versions			
QT1K15C1, C2	1.5 m		
QT1K20C1, C2, C3	2 m		
QT1K25C1, C2	2.5 m		
QT1K30C1	3 m		
QT1K35C1, C2	3.5 m		
QT1K50C1	5 m		
QT1K60C1	6 m		

	QT1LxxP-X
Sensor type	KTY82-121, 1000 0hm @ 25°C
Range	-40÷110°C
Precision	±1.5°C @ 25°C
Tube	Ø 6 x 20 mm; AISI 304 steel
Cable	$2\text{wires}x0.25\text{mm}^2; \text{double insulated, thermoplastic rubber cable 03.3\text{mm; loose leads}$
Protection	IP67

Standard versions	
QT1L20P-X	2 m

MOQ: 10 pieces

	QT1NxxP-/01
Sensor type	KTY82-121, 1000 0hm @ 25°C
Range	-40÷110°C
Precision	±1.5°C @ 25°C
Tube	Ø 6 x 40 mm; AISI 304 steel
Cable	2 wires x 0.25mm²; screened silicon cable Ø 4.6mm; loose leads
Protection	IP67

Standard versions		
QT1N20P-/01	2 m	
QT1N30P-/01	3 m	
MOQ: 10 pieces		

Pt100 & thermocouples

Temperature probes

	QP1NxxP-X	
Sensor Type	Pt100 class B	
Range	-40÷110°C	
Precision	±0.3°C @ 0°C	
Tube	Ø 6 x 40 mm; AISI 304 steel	
Cable	3 wires x 0.25mm²; thermoplastic rubber cable Ø 3.4 mm; loose leads	
Protection	IP67	

Standard versions		
0P1N20P-Y	2 m	

MOQ: 10 pieces

	SPT0
Sensor Type	Pt100 class "B" (DIN43760), 100Ω @ 0°C
Range	0÷400°C
Precision	±0.3°C or ±0.5°C (in the worst case scenario)
Response time	10 seconds in water
Sheath	Ø 6 x 160 mm; stainless steel AISI316
Cable	3 wires x 0.24 mm²; L = 100 cm, fiber glass, loose leads
Protection	IP65



	TJ.ECO	
Sensor Type	J thermocouple	
Range	0÷450°C	
Precision	±2.5°C o ±0.75% (in the worst case scenario)	
Response time	10 seconds in water	
Sheath	Ø 6 x 160 mm; stainless steel AISI316	
Cable	2 wires x 0.50 mm²; L = 300 cm, fiber glass, loose leads	
Protection	IP65	



	TK.ECO
Sensor Type	K thermocouple
Range	0÷600°C
Precision	$\pm 2.5^{\circ}\text{C}$ o $\pm 0.75\%$ (in the worst case scenario)
Response time	approx. 2 seconds in water
Sheath	Ø 4.5 x 160 mm; INCONEL600
Cable	2 wires x 0.24 mm²; L = 300 cm, fiber glass, loose leads
Protection	IP65

