

LOTS OF
OPTIONS,
JUST ONE
CHOICE.



CATALOGUE

**A successful
method**



**PRODUCT
DESIGNING**



ASSEMBLY



EOL TEST



**WORLDWIDE
SALES**



Suitable for use R290



Wireless connection



Bluetooth



Internet of Things

GLOBAL MARKET PRESENCE

Today millions of professional and commercial refrigerators, blast chillers and freezers, dough-retarder provers, ovens, air conditioners, compressed air dryers are controlled by high-performance regulators. You may often wonder who manufactures these customized electronic controls.

If you see a product operating with innovative technology & long lasting performance it is likely to be our LAE ELECTRONIC brand.

LEADER IN CUSTOMIZED CONTROLLERS

For many years we have proven to be leaders in the designing of customized controllers based on the technical specifications and design of the system to be controlled. For over thirty years, we have supported innovative changes requested by some of the most reputable world manufacturers.

Our Customers recognize the competency and the unique know-how with which we approach the project phases, creating synergies for the development of original and unique proposals. Solutions we help provide are the key to the complete success of their system.

PERFECT INTEGRATION

We aim to produce a perfect integration into your applications, without compromise, making LAE Electronic controllers among the best ever in the global marketplace. Our products have a solid reputation for reliability and incredible efficiency in the toughest working conditions. Being aesthetically sophisticated and easy to operate, they are just as user-friendly as a tablet or a smartphone.

ENVIRONMENT & ETHICAL CODE



LAE policy is to always respect all environmental protection concerns that are important to all consumers. We develop functions and adopt technologies that best meet the growing needs for energy saving and low environmental impact.

Another cornerstone of our company policy is focused on ethical treatment of all workers. We closely work with exclusively selected suppliers that have adopted ethical codes.

CONNECTIVITY

Our R&D division is continuously engaged in the assessment of the latest generation of new technologies, especially with respect to the collection and processing of data. These connectivity features are now easily obtainable providing great functionality for the end-user and the manager. Machines that communicate and coordinate among them, by means of our controllers, form a much more efficient and easily controllable system, with enormous benefits in terms of safety, process stability and product quality.

Leader in the designing of high-profile solutions

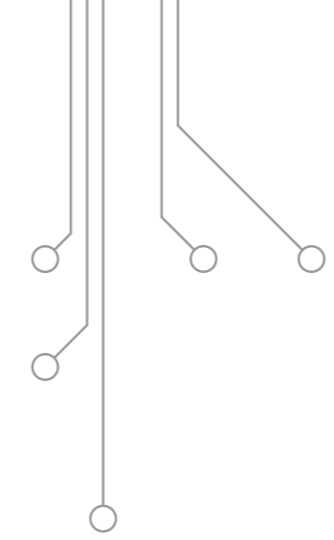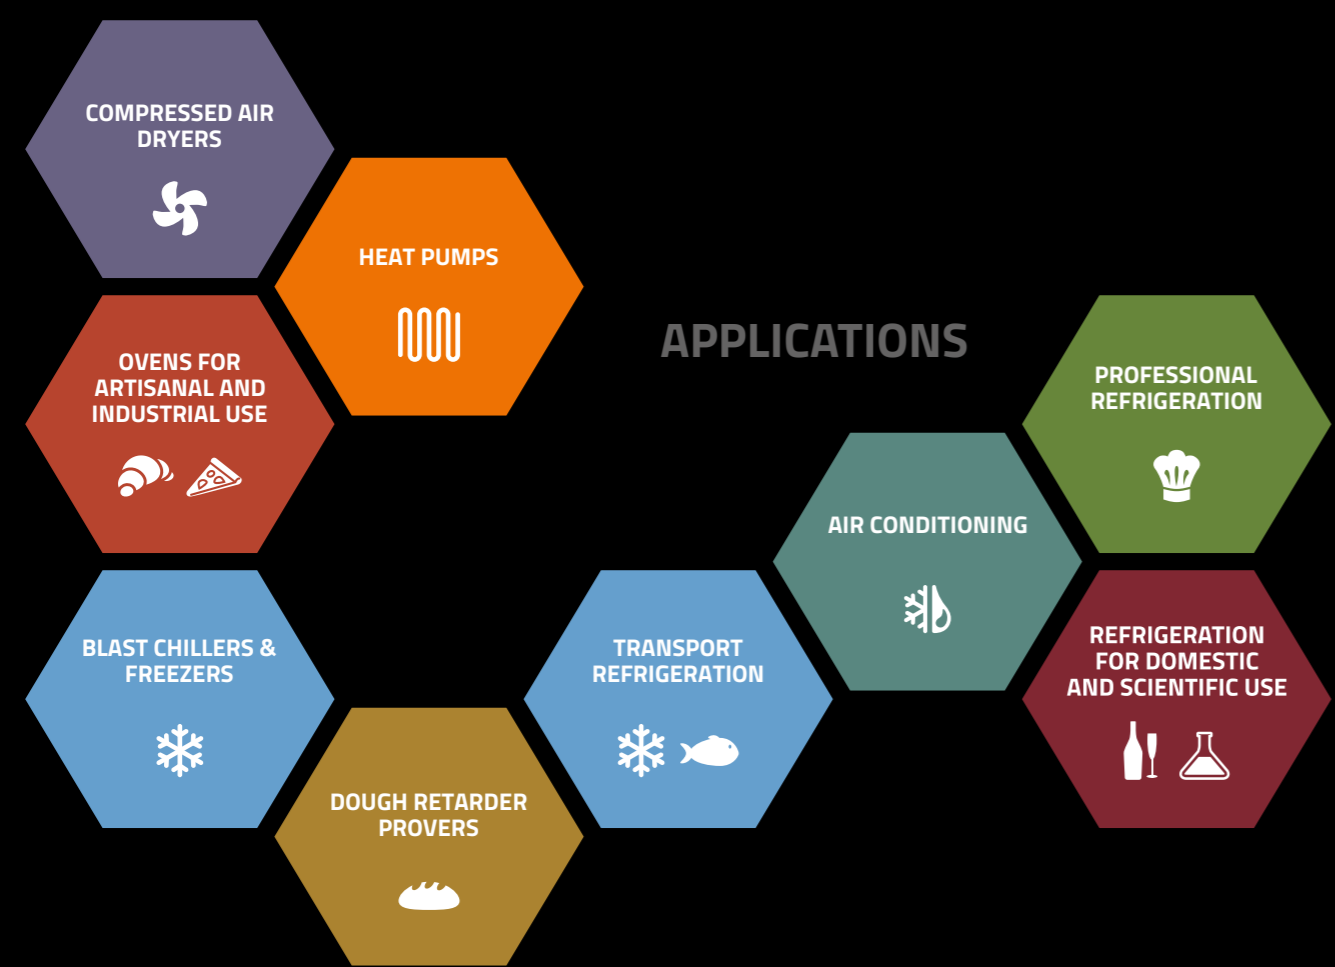

For over ten years LAE Electronic has been investing in technologies and human resources for the designing of high-profile customised controllers and Human-Machine Interfaces, in order to obtain the best results in terms of aesthetics, performances, versatility and intuitive use.


The major world players recognise the competency and the unique know-how with which we approach the project phases. This has become our core-business, allowing an expansion in turnovers and means.



Touch screen displays

We offer high-performance TFT touch screen displays with various formats, from 4.3" up to 10", both capacitive and resistive.

The variety of graphic options is unlimited, in order to offer the most suitable configuration to those who daily need to work with an intuitive and effective interface, featuring no complications.

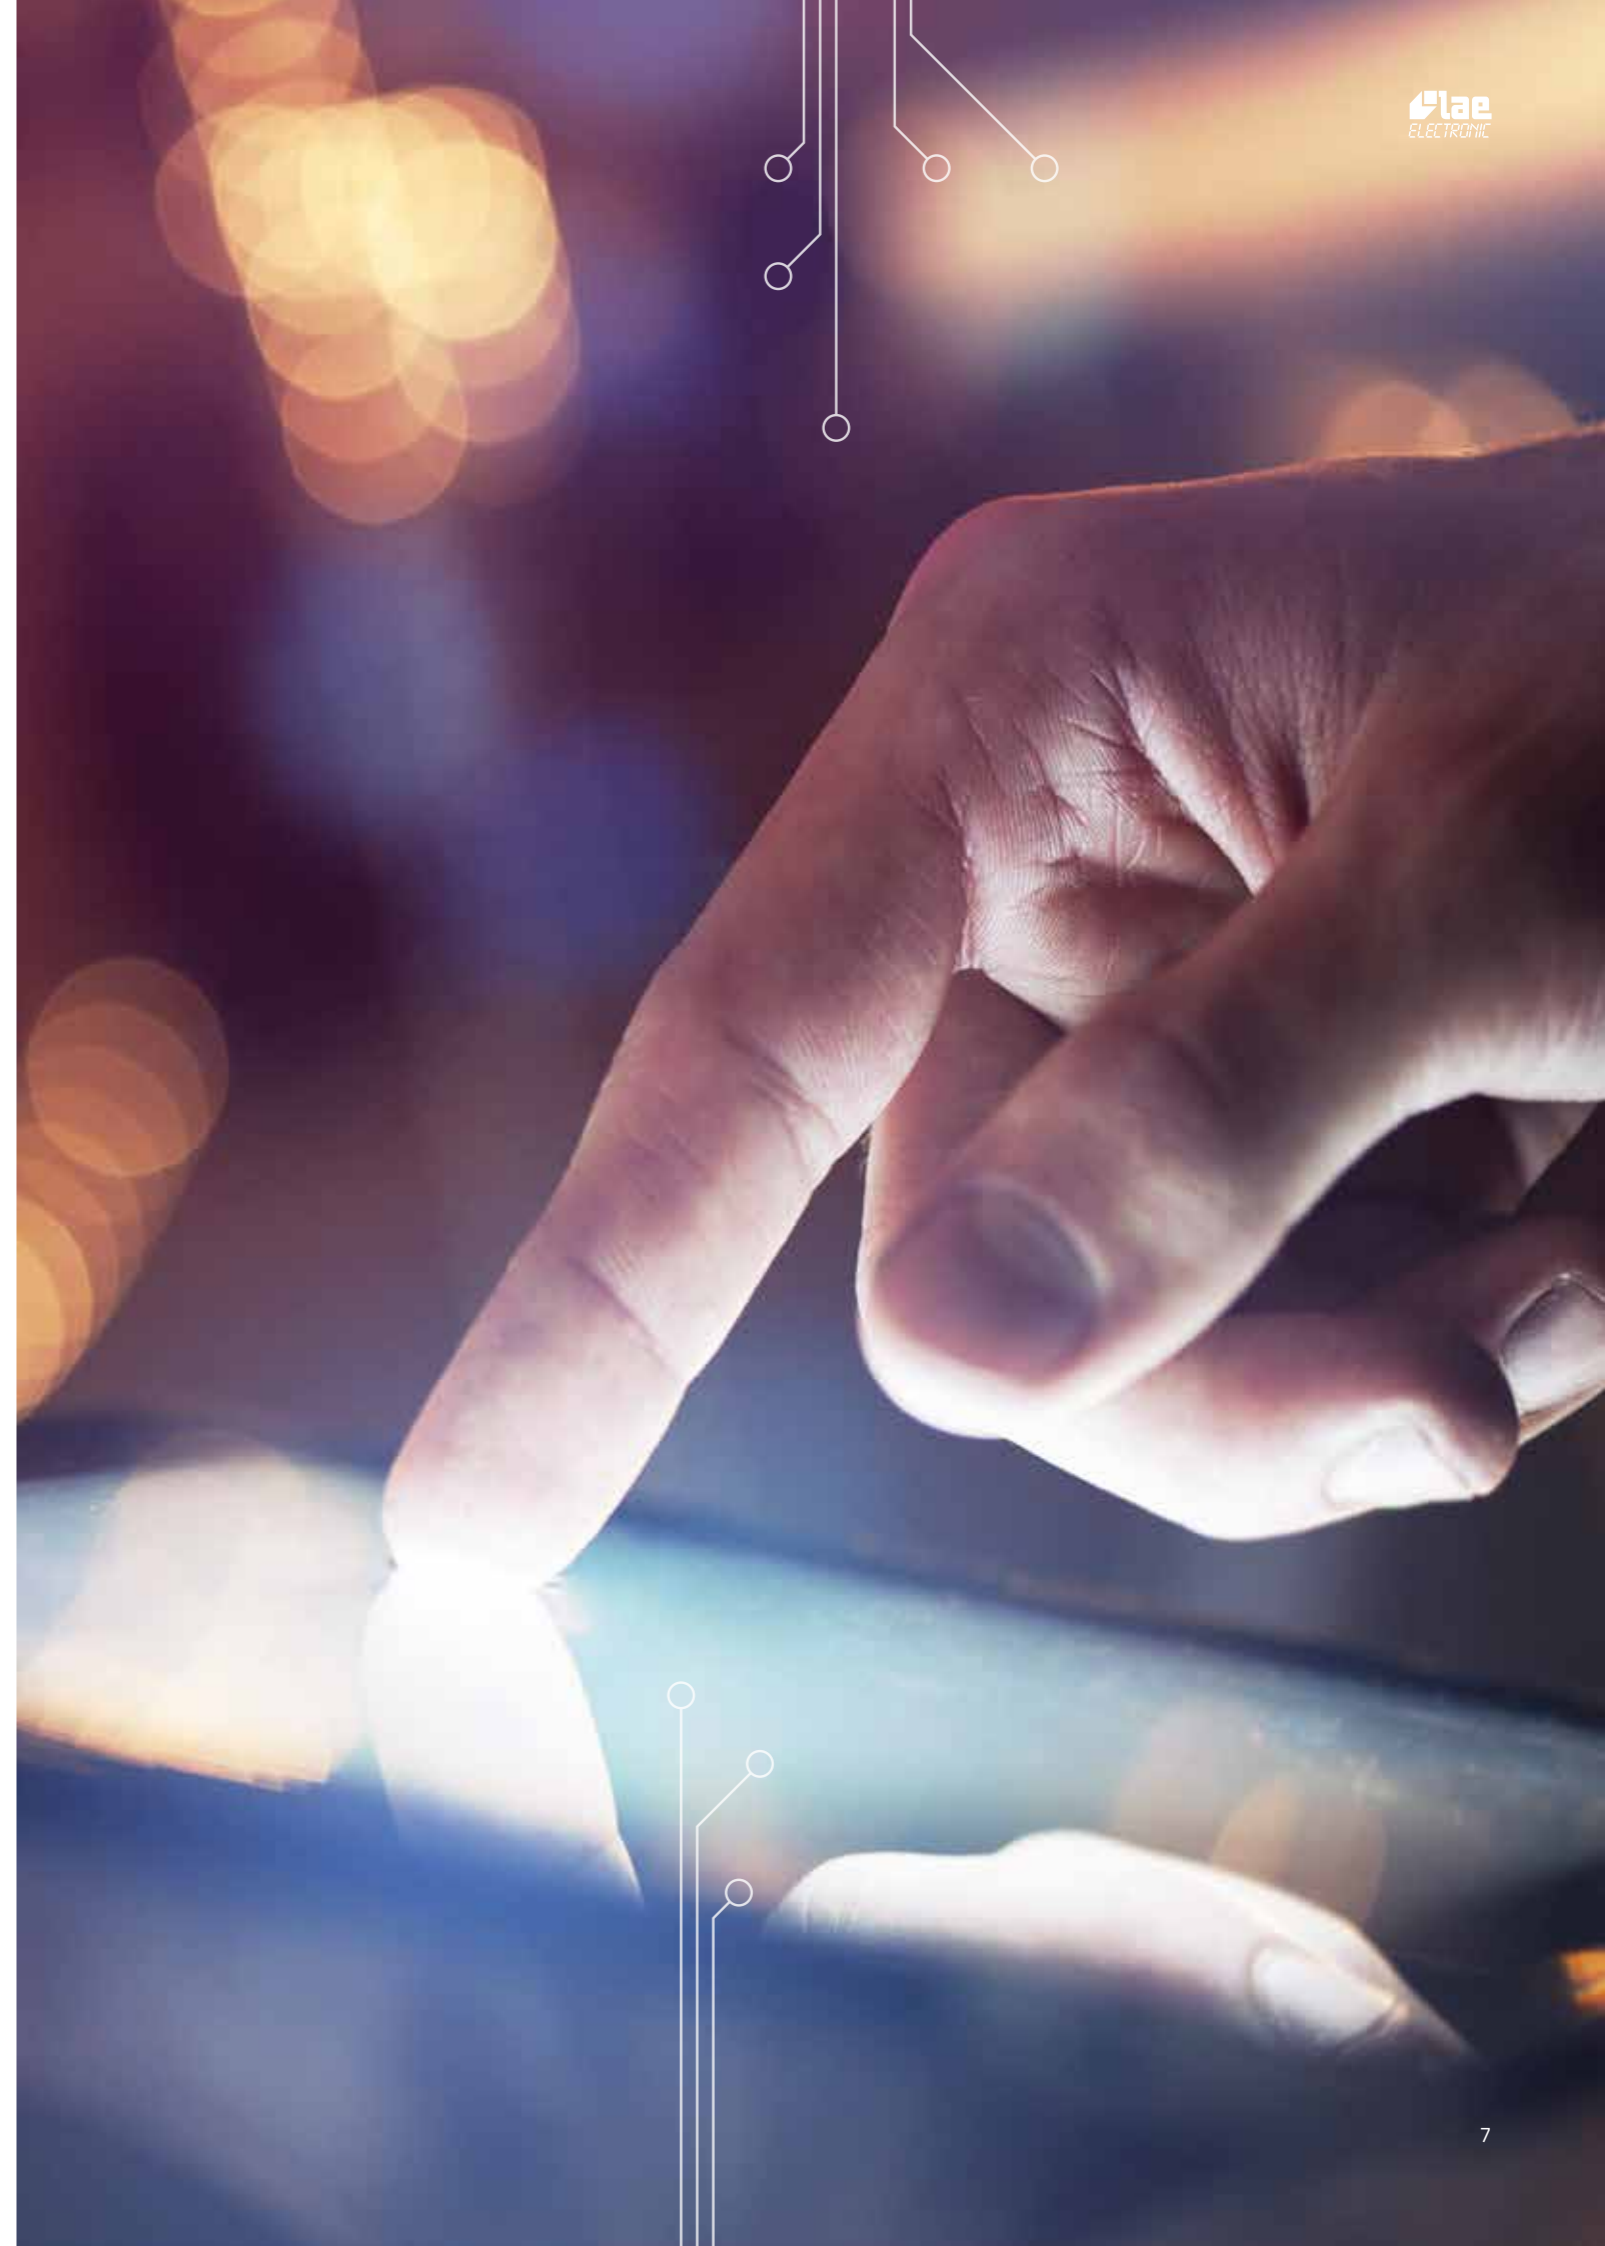


Cloud services

A cloud-based software suitable for use with the LAE controllers, **accessible anywhere and anytime via a web browser or mobile App.**

Its User Interface may be **customised** to suit the specific customer's requirements as to webpage layout, colours, logo and functions.

The adoption of the **most updated security and privacy standards** is guaranteed at all times.

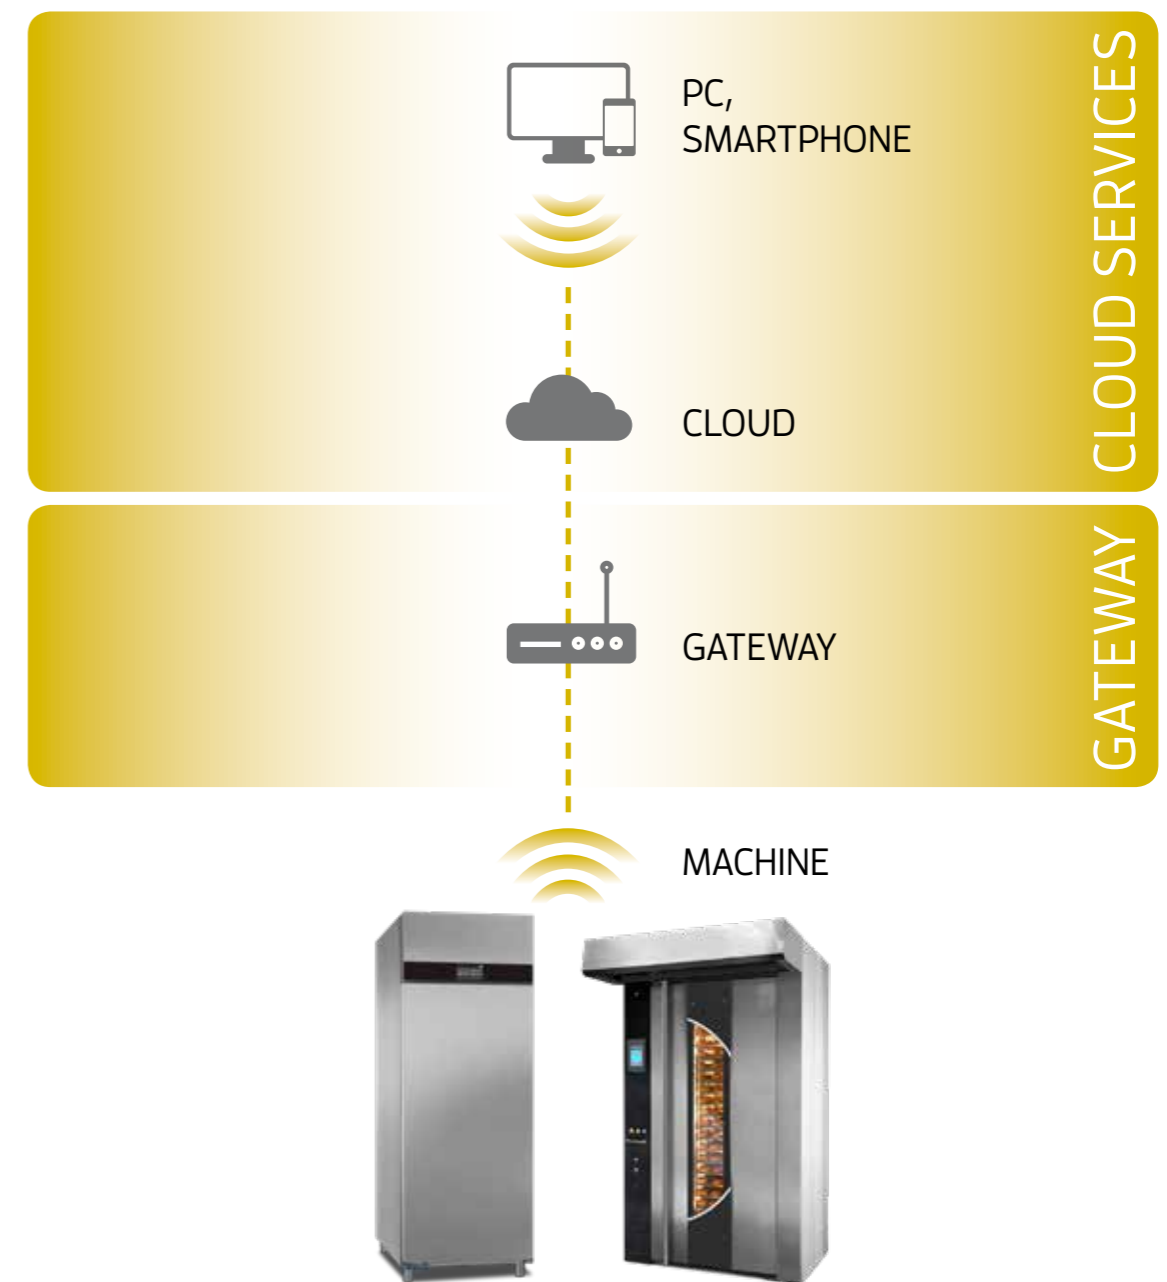

The complete scenario of the plant connected is always and anywhere **under control via your Smartphone, tablet or PC.**

Maximum productivity is thus ensured and **the risk of downtimes, unpredicted maintenance costs and high operation costs is actually eliminated.**

A precise continual supervision allows the machine parameters to be programmed when needed and machine components to be serviced or replaced in a timely manner so as to always maintain the best product quality and texture without the risk of losses.

This cloud-based software is a very powerful service tool to **add significant value to the offer range of OEMs**, service engineers and system managers, ensuring peace of mind, long lasting operation and optimised performance of the machines.

Gateway



WIFI OR RS485



TO THE CLOUD:
3G OR NB-IOT



SIM CARD WITH
GDSP TECHNOLOGY



AUTOMATIC
CONFIGURATION



VERY HIGH SECURITY
LEVEL/ENCRYPTION



GTW-0X

90 x 60 x 28 mm

For IoT
communication

Main Features

- WiFi: IEEE 802.11 b/g/n
- Bluetooth
- GSM/GPRS/EDGE, UMTS/HSDPA/HSUPA and NB-IoT networks supported
- SIM connector
- Connector for LCD LVDS display
- RTC

Applications

Air conditioners, heating systems, commercial and professional refrigerators, blast chillers and freezers, dough-retard provers, heating/cooling combi catering machines, professional ovens, ice makers, transport refrigeration, high-end domestic refrigerators.

Technical Data

| | |
|---------------------------|---|
| CPU | NXP i.MX 6ULL |
| Core | Cortex-A7 @ 800MHz |
| Memory | 28MB DDR3-800, 256MB SLC NAND Flash |
| OS | Linux embedded, YOCTO project (rev. 4.1.43) |
| 10/100 Ethernet interface | |
| USB Type A | |
| microSD | |
| RS485 | |
| RS232 | |
| Power supply | 7 to 40 Vdc |
| Tiny Size | 90 x 60 x 28 mm |
| Internal web server | |

- The GTW-0x Gateway is a computer with Operating System, memory and communication ports, designed specifically to run IoT communication securely.
- One single gateway may serve several controllers, connected to it via WiFi or RS485 hard-wired line.
- An internal webserver configures the network of controllers automatically without complications for the user.
- The connection from the Gateway to the cloud takes place on 3G or NB-IOT or alternatively via Ethernet through a local router. Very high security level and encryption are ensured at all times.
- A SIM card designed for data traffic, with GDSP technology, allows global coverage, at very low traffic costs.

Standard products

| | |
|---------------------------|--------|
| CONTROLLERS | Pg. 13 |
| REFRIGERATION CONTROLLERS | Pg. 17 |
| COMPRESSOR CONTROLLER | Pg. 34 |
| TIMER | Pg. 35 |
| SUPERVISORY SYSTEMS | Pg. 36 |
| PROBES - TRANSMITTERS | Pg. 37 |

CONTROLLERS

AC1-2W

110 x 53 x 75 mm

Two channel universal Controller, ON/OFF or PID



AC1-2W series

| Functions | AC1-2WT... | AC1-2WA... |
|---------------------|------------------------|------------------------|
| Input type | PTC | NTC10K* |
| Range | -50÷150°C -60÷300°F | -40÷125°C -40÷260°F |
| Accuracy | ±0.3°C | ±3mV |
| Resolution | 0.1 / 1°C / 1°F | 0.1 / 1 |
| Ambient temperature | -10÷50°C | |

^[a] -50÷150°C; ^[b] remaining range.

* The standard NTC10K is the SN4B20P1


Main Features

- Wall-mount controller
- Runs on mains power supply
- PID with autotuning or ON/OFF control
- Input for 0÷1V, PTC/NTC10K
- 0.1 / 1°C or 1°F resolution
- Selectable Refrigerating/Heating [Dehumidifying/Humidifying] control
- Absolute or relative temperature alarms
- ON/OFF button on front
- Connectivity to LAE TAB supervisory systems


Applications

Temperature: control of small cold stores, heating systems, bains-marie, ovens, laboratory equipment.

Humidity: control of greenhouses, seasoning cells, cold rooms, air-conditioned rooms.

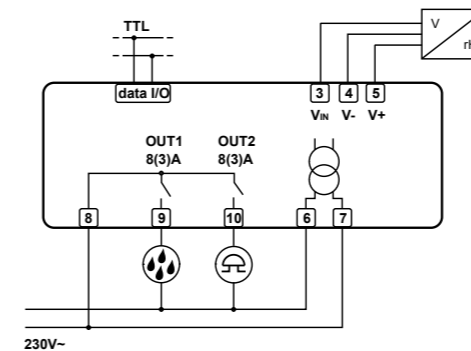

AC1-2WAQ2RE-A

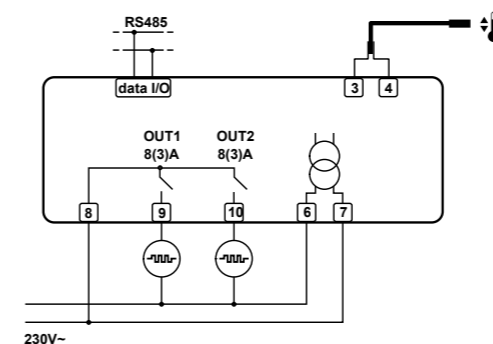

AC1-2WTQ2RE-B

| | AC1-2W | T | Q | 2 | R | E | -B |
|------|--------------|--------------------------------|-----|-----|-----|-----|-----|
| | | (1) | (2) | (3) | (4) | (5) | (6) |
| Pos. | Function | Description | | | | | |
| (1) | Input | A = 0÷1V; T = PTC / NTC10K | | | | | |
| (2) | Connections | Q = Detachable screw terminals | | | | | |
| (3) | Output No. | 1 = one; 2 = two | | | | | |
| (4) | Output type | R = relay | | | | | |
| (5) | Supply | E = 230Vac 50/60Hz 50/60Hz 3 W | | | | | |
| (6) | Serial comm. | Nil = no; -A = TTL; -B = RS485 | | | | | |

How to order:

- AC1-2WTQ2RE-B (PTC/NTC10K input, detachable screw terminals, 2 relays, 230Vac supply voltage, RS485 port)
- AC1-2WAQ2RE-A (0÷1V input, detachable screw terminals, 2 relays, 230Vac/dc supply voltage, TTL port)

➤ In order to know versions available, please consult LAE or our local dealer.

AC1-5

77 x 35 x 77 mm

Two channel universal Controller, ON/OFF or PID




Main features


- Runs on universal mains power supply
- PID with autotuning or ON/OFF control
- Main output on 12A relay or for SSR-piloting and auxiliary output on 5A relay
- Input for 0÷1V, 0/4÷20mA, PTC/NTC10K, TC J/K or Pt100
- 0.1 / 1°C or 1°F resolution
- Selectable Refrigerating/Heating (Dehumidifying/Humidifying) control
- Absolute or relative temperature alarms
- ON/OFF button on front
- Connectivity to LAE TAB supervisory systems

Applications

Temperature: Control of small cold stores, refrigerated cabinets and tables, heating systems, heated cupboards, bains-marie, ovens, laboratory equipment.
Humidity: Control of greenhouses, seasoning cells, cold rooms, air-conditioned rooms.

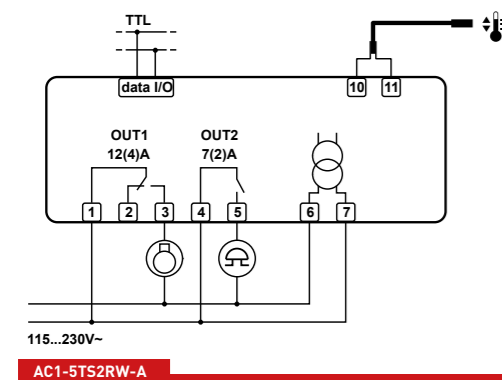

AC1-5TS2RW-A

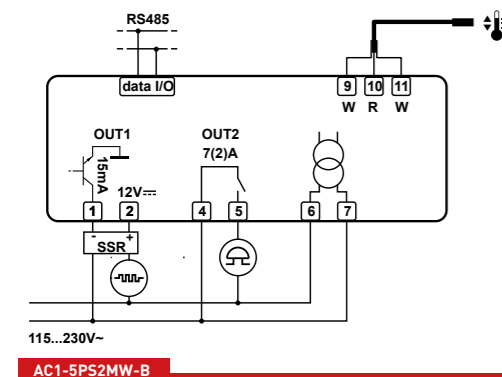

AC1-5PS2MW-B

AC1-27

71 x 97 x 61 mm DIN rail

Two channel universal Controller, ON/OFF or PID




Main features


- Runs on mains power supply
- PID with autotuning or ON/OFF control
- Main output on 12A relay or for SSR-piloting and auxiliary output on 5A relay
- Input for 0÷1V, PTC/NTC10K, TC J/K or Pt100
- 0.1 / 1°C or 1°F resolution
- Selectable Refrigerating/Heating (Dehumidifying/Humidifying) control
- Absolute or relative temperature alarms
- ON/OFF button on front
- Connectivity to LAE TAB supervisory systems

Applications

Temperature: on control panels for small cold stores, heating systems, heated cupboards, bains-marie, ovens, laboratory equipment.
Humidity: on control panels for greenhouses, seasoning cells, cold rooms, air-conditioned rooms.

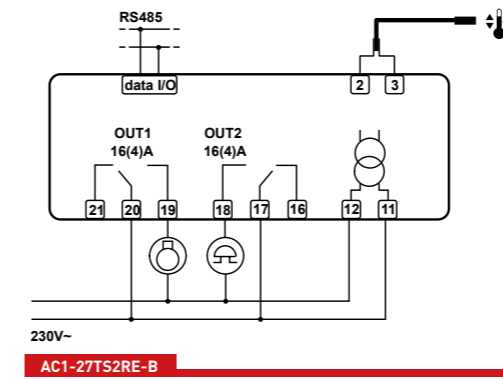

AC1-27TS2RE-B

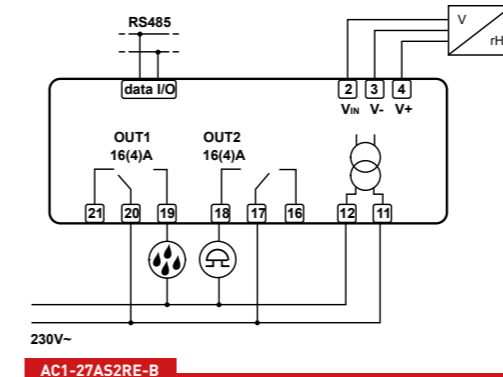

AC1-27AS2RE-B

| Series AC1-5 | | | | | | |
|---------------------|--------------------|---------------|--|---------------|---------------|-----------------------|
| Functions | AC1-5T... | | AC1-5P... | AC1-5J... | | AC1-5I... |
| Input type | PTC | NTC10K* | Pt100 | TC "J" | TC "K" | 0+1V |
| Range | -50 +150°C | -40 +125°C | -100 +850°C | -50 +750°C | -50 +999°C | Configurable in setup |
| Accuracy | ±0.3°C | ±0.3°C | ±0.3°C ^(a) ; ±1°C ^(b) | ±3°C | ±3mV | ±0.2mA |
| Resolution | 0.1 / 1°C / 1°F | | 1°C / 1°F | | 0.1 / 1 | |
| Panel cut-out | 71 x 29 mm (W x H) | | | | | |
| Ambient temperature | -10÷50°C | | | | | |

^(a) -50÷150°C; ^(b) remaining range
 * The standard NTC10K is the SN4B20P1

How to order:

- AC1-5TS2RW-A (PTC/NTC10K input, screw terminals, 2 relays, 115÷230Vac supply voltage, TTL port)
- AC1-5JS2MW-B (J/K TC input, screw terminals, output 1 on SSR drive, output 2 on relay, 115÷230Vac supply voltage, RS485 port)

➤ On request, the AC1-5 is also available with gasket for a better protection between bezel and panel.

➤ In order to know versions available, please consult LAE or our local dealer.

| AC1-5 | | | | | | |
|-------|-------------|-----|-----|-----|-----|-----|
| | T | S | 2 | R | W | -B |
| | (1) | (2) | (3) | (4) | (5) | (6) |
| Pos. | Function | | | | | |
| (1) | Input | | | | | |
| (2) | Connections | | | | | |
| (3) | Output No. | | | | | |
| (4) | Output type | | | | | |
| (5) | Supply | | | | | |
| (6) | Serial comm | | | | | |

* = in the version with 12Vac/dc power supply, the maximum voltage on the outputs is 50Vac/dc, in order to ensure safety insulations.

| AC1-27 series | | | | | | |
|---------------------|------------------------|------------------------|--|------------------------|------------------------|-----------------------|
| Functions | AC1-27T... | | AC1-27P... | AC1-27J... | | AC1-27A... |
| Input type | PTC | NTC10K* | Pt100 | TC "J" | TC "K" | 0+1V |
| Range | -50÷150°C -60÷300°F | -40÷125°C -40÷260°F | -100÷850°C -150÷999°F | -50÷750°C -60÷999°F | -50÷999°C -60÷999°F | Configurable in setup |
| Accuracy | ±0.3°C | ±0.3°C | ±0.3°C ^(a) ; ±1°C ^(b) | ±3°C | | ±3mV |
| Resolution | 0.1 / 1°C / 1°F | | | 1 °C / °F | | 0.1 / 1 |
| Ambient temperature | -10÷50°C | | | | | |

^(a) -50÷150°C; ^(b) remaining range.
 * The standard NTC10K is the SN4B20P1

| AC1-27 | | | | | | |
|--------|--------------|-----|-----|-----|-----|-----|
| | T | S | 2 | R | E | -B |
| | (1) | (2) | (3) | (4) | (5) | (6) |
| Pos. | Function | | | | | |
| (1) | Input | | | | | |
| (2) | Connections | | | | | |
| (3) | Output No. | | | | | |
| (4) | Output type | | | | | |
| (5) | Supply | | | | | |
| (6) | Serial comm. | | | | | |

How to order:

- AC1-27JS2RE-B (TC J/K input, screw terminals, 2 relay outputs, 230Vac supply voltage, RS485 port).
- AC1-27AS2E-B (0÷1V input, screw terminals, 2 relay outputs, 230Vac supply voltage, RS485 port)

➤ In order to know versions available, please consult LAE or our local dealer.

LTR-5

77 x 35 x 77 mm

Single output ON/OFF or PID controller



Main features

- Runs on mains power supply
- PID with autotuning or ON/OFF control
- Output on relay (16A) or SSR piloting
- Input for PTC, NTC10K or 0÷1V
- 0.1 / 1°C or 1°F resolution
- Refrigerating (dehumidifying) or heating (humidifying) control mode selection
- ON/OFF button on front
- Connectivity LAE supervisory systems

Applications

Temperature: Control of small cold stores, refrigerated cabinets and tables, heating systems, heated cupboards, bains-marie, ovens, laboratory equipment.

Humidity: Control of greenhouses, seasoning cells, cold rooms, air-conditioned rooms.

Series LTR-5

| Functions | LTR-5T.. | LTR-5C.. | LTR-5A... |
|---------------------|--|--|----------------|
| Input type | PTC | NTC10K | 0÷1V |
| Range | -50÷150°C -60÷300°F | -40÷125°C -40÷260°F | 0÷99.9% r.H. |
| Accuracy | ±0.3°C ^[a] ; ±1.0°C ^[c] | ±0.3°C ^[b] ; ±1.0°C ^[c] | ±0.7% r.H. |
| Resolution | 0.1 / 1°C, °F | | 0.1 / 1 % r.H. |
| Front protection | IP55 | | |
| Panel cut-out | 71 x 29 mm (W x H) | | |
| Ambient temperature | -10÷50°C | | |

^[a]-50÷140°C; ^[b]-40÷110°C; ^[c]remaining range.


| LTR-5 | C | S | R | E | -B |
|-------|--------------|---|-----|-----|-----|
| | (1) | (2) | (3) | (4) | (5) |
| Pos. | Function | Description | | | |
| (1) | Input | T = PTC; C** = NTC10K; A = 0÷1V | | | |
| (2) | Connectors | S = screw terminals | | | |
| (4) | Output type | R = relay; F = SSR drive | | | |
| (5) | Supply | D = 12Vac/dc; E = 230Vac, U = 115Vac, 2 W | | | |
| (6) | Serial comm. | - = no serial port; -A = TTL; -B = RS485 | | | |

** The standard NTC probe is the SN4B20P1

How to order examples:

- LTR-5CSFE-B (NTC10K input, 1 SSR drive output, screw terminals, 230Vac supply, RS485 port)
- LTR-5ASRE (0÷1V input, 1 relay, screw terminals, 230Vac supply, no serial port)

- On request, the LTR-5 is also available with gasket for a better protection between bezel and panel.
- In order to know more options available for the models, please consult LAE or our local dealer.

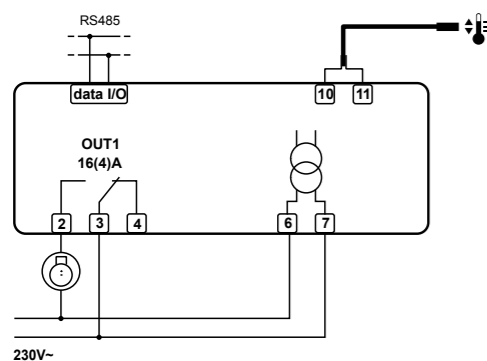

LTR-5CSRE-B

AD2-5

77 x 35 x 90 mm

Universal Refrigeration Controller



Main features

- Defrosts at regular intervals
- Optional synchronized defrost start and termination with master-slave connection
- Selectable NTC10K or PTC input
- Universal 115-230Vac power supply
- FLEXICOLD function for energy saving or alternative setpoint
- Optional control of a second compressor or evaporator
- Excellent evaporator fan control
- Temperature, door open, condenser high temperature/pressure alarms
- Light and standby control (On/Off)
- Connectivity to LAE supervisory systems

Applications

Plug-in cabinets, supermarket display cases, cold stores, control panels, upright fridges and freezers, refrigerated tables.


AD2-5 series

| Functions | | B03W-BG | C14W-AG | C34W-BG |
|--------------------|-------------------------|---------|---------|---------|
| Temperature inputs | Thermostat | • | • | • |
| | Evaporator | • | • | • |
| | Auxiliary | | • | • |
| Door switch input | Voltage free contact | • | • | • |
| | Voltage free contact | | • | |
| Digital inputs | 12, 24Vac voltage | | | |
| | Defrost synchronisation | | | • |
| | Thermostat | • | • | • |
| Outputs | Evaporator fans | • | • | • |
| | Defrost | • | • | • |
| | Auxiliary | | • | • |
| Power supply | 115-230Vac | • | • | • |
| | 12Vac/dc | | | |
| Serial port | TTL serial port | | • | |
| | RS-485 serial port | • | | • |
| Keypad | Generic | • | • | • |
| | With light button | | | |

- All models come with an alarm buzzer.
- All models are fitted with detachable screw terminals.
- On request, the AD2-5 is also available with gasket for a better protection between bezel and metal panel.
- In order to know more options available for the models, please consult LAE or our local dealer.

Technical Data

| | |
|---------------------|--|
| Control Range | -50÷120°C, -55÷240°F |
| Resolution | 0.1 / 1 °C; °F |
| Accuracy | NTC10K: <±0.3°C (-40.0÷70.0°C) PTC1000: <±0.5°C (-50÷120°C) |
| Sensor type | Selectable NTC10K standard mod. SN4B20P1/P2/P3 or PTC1000 |
| Power supply | 115÷230V~ ±10% 50÷60Hz 3W |
| Front protection | IP55 |
| Panel cut-out | 71 x 29 mm (W x H) |
| Ambient temperature | -10÷50°C |

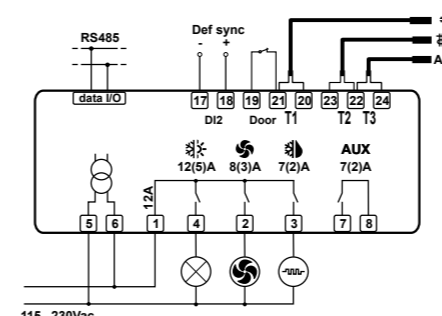

AD2-5C34W-BG

Compact Comprehensive Refrigeration Controller




NEW

Main features


- Up to 5 configurable outputs for a perfect adaptation to the specific needs such as: control of variable speed compressors (*example 2*) or fans (*example 1*), drive of a large external compressor relay (*example 3*), control of lights, ON/OFF fans, heaters, switched loads, defrost, alarms, second evaporator
- With or without RTC for timed control functions
- Suitable for R290 compressors
- Universal mains power supply
- Connectivity to residential supervisory systems or Cloud
- Several display colour options: amber, blue, green, red or white

Applications


Upright refrigerators, plug-in and supermarket display cases, refrigerated vehicles, cold stores, control panels.

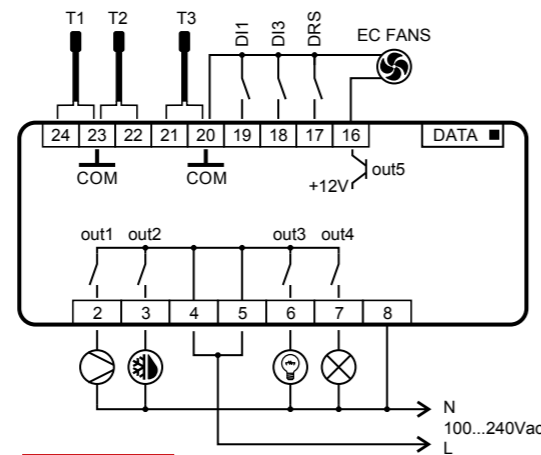

EXAMPLE 1

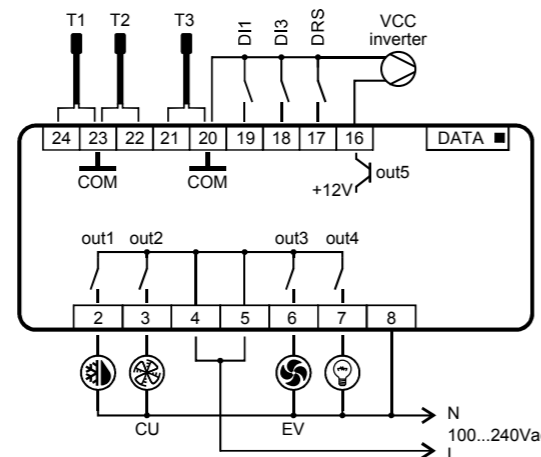

EXAMPLE 2

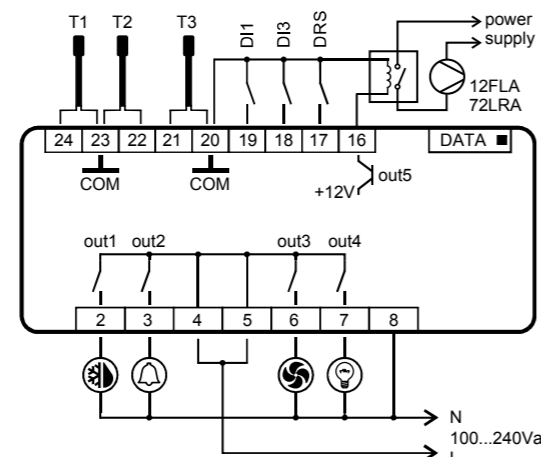

EXAMPLE 3

BR5 series

| Functions | | -A001WR | -B001WR | -A101WT |
|-----------------------------|--|----------------|---------|---------|
| Output OUT5 | -A For ECM fans | • | | • |
| | -B For VCC | | • | |
| RTC | 0 Fitted | • | • | |
| | 1 None | | | • |
| Inputs/Outputs | 01 Standard version: 6 inputs, 4 outputs | • | • | • |
| | Power Switch | W 100...240Vac | • | • |
| Serial communication | R RS485 | • | • | |
| | T TTL | | | • |
| | F WiFi (external module) | | | |
| Aesthetical options and F/W | - None | | | |

› All models are fitted with buzzer.

Technical Data

| | |
|----------------------------------|--------------------------------------|
| Range | -50÷110°C, -58÷180°F |
| Resolution | 0.1 / 1°C; °F |
| Precision | <±0.5°C within the measurement range |
| Sensor type | NTC 10KΩ@25°C |
| Relay output max loads (240Vac): | |
| OUT1 | 12A resistive 3.5 FLA; 21 LRA |
| OUT2 | 7A resistive 1 FLA; 4 LRA |
| OUT3 | 7A resistive 1 FLA; 4 LRA |
| OUT4 | 7A resistive 1 FLA; 4 LRA |
| OUT5 | SELV 90mA@12Vac |
| Power supply | 100÷240Vac ±10% 50÷60Hz 3W |
| Ambient temperature | -10÷50°C |
| Real Time Clock battery | >10 years |

AD2-28

107 x 95 x 47 mm

Versatile Split Refrigeration Controller



Main features

- Cyclic defrosts
- Synchronized defrost start and termination with master-slave connection
- Selectable NTC10K or PTC input
- FLEXICOLD function for energy saving or alternative setpoint
- Optional control of a second compressor or evaporator
- Excellent evaporator fan control
- Absolute or relative temperature alarms, door open alarm, condenser high temperature/pressure alarm
- Light and standby control (On/Off)
- Connection to LAE supervisory systems
- Available display unit: LCD-5S or RU33


Applications

Upright refrigerators, plug-in and supermarket display cases, cold stores, control panels.

AD2-28 series

| Functions | | B1T5E-A | C1S4E-A | C1S5E-B |
|-----------------------|-------------------------|---------|---------|---------|
| Temperature inputs | Thermostat | • | • | • |
| | Evaporator | • | • | • |
| | Auxiliary | • | • | • |
| Door switch | Voltage free | • | • | • |
| | Voltage free | • | • | • |
| Digital input aux.DI2 | 12÷24Vac | | | |
| | Defrost synchronisation | | | |
| Connections | Quick on M/F | | | |
| | On screw terminals | • | • | • |
| Displays | LCD-5S | | • | • |
| | RU33 | • | | |
| Outputs | Thermostat | • | • | • |
| | Evaporator fans | • | • | • |
| | Defrost | • | • | • |
| | Auxiliary 1 | • | • | • |
| | Auxiliary 2 | • | • | • |
| Power supply | 230Vac | • | • | • |
| | TTL | • | • | |
| Serial port | RS-485 | | | • |

› All models come with an alarm buzzer.
› In order to know more options available for the models, please consult LAE or our local dealer.

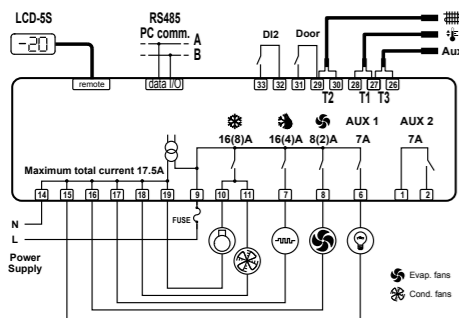

Technical data

| | |
|---------------------|--|
| Range | -50...120°C, -55...240°F |
| Resolution | 0.1 / 1 °C; °F |
| Precision | NTC10K: $\pm 0.3^{\circ}\text{C}$ (-40.0÷70.0°C) PTC1000: $\pm 0.5^{\circ}\text{C}$ (-50÷120°C) |
| Sensor type | Selectable NTC10K standard mod. SN4B20P1/P2/P3 or PTC1000 |
| Power supply | 230V~ ±10% 50÷60Hz 3W |
| Ambient temperature | -10÷50°C |



Technical data LCD-5S display unit

| | |
|---------------------|-------------------------|
| Dimensions | 77 x 35 x 20 mm (WxHxD) |
| Panel cut-out | 71 x 29 mm (WxH) |
| Front protection | IP55 |
| Ambient temperature | -10÷50°C |



Technical data RU33 display unit

| | |
|---------------------|--------------------------|
| Dimensions | 169 x 38 x 25 mm (WxHxD) |
| Panel cut-out | 163 x 31.5 mm (WxH) |
| Front protection | IP55 |
| Ambient temperature | -10÷50°C |

AR2-28

107 x 95 x 47 mm

Versatile Split Refrigeration Controller with RTC



Main features

- Up to six real time defrosts
- Synchronized defrost start and termination with master-slave connection
- Selectable NTC10K or PTC input
- FLEXICOLD function for energy saving or alternative setpoint
- Optional control of a second compressor or evaporator
- Excellent evaporator fan control
- Absolute or relative temperature alarms, door open alarm, condenser high temperature/pressure alarm
- Light and standby control (On/Off)
- Connection to LAE supervisory systems
- Available display unit: LCD-5S or RU33

Applications

Plug-in cabinets, supermarket display cases, cold stores, control panels, upright fridges and freezers, refrigerated tables and all those applications where real time defrost is required.

AR2-28 series

| Functions | | B1T5E-A | C1S4E-A | C1S5E-B |
|-----------------------|-------------------------|---------|---------|---------|
| Temperature inputs | Thermostat | • | • | • |
| | Evaporator | • | • | • |
| | Auxiliary | | • | • |
| Door switch | Voltage free | • | • | • |
| | Voltage free | • | • | • |
| Digital input aux.DI2 | 12÷24Vac | | | |
| | Defrost synchronisation | | | |
| Connections | Quick on M/F | | | |
| | On screw terminals | • | • | • |
| Displays | LCD-5S | | • | • |
| | RU33 | • | | |
| Outputs | Thermostat | • | • | • |
| | Evaporator fans | • | • | • |
| | Defrost | • | • | • |
| | Auxiliary 1 | • | • | • |
| | Auxiliary 2 | • | • | • |
| Power supply | 230Vac | • | • | • |
| | TTL | • | • | |
| Serial port | RS-485 | | | • |

› All models come with an alarm buzzer.

› In order to know more options available for the models, please consult LAE or our local dealer.


Technical data LCD-5S display unit

| | |
|---------------------|-------------------------|
| Dimensions | 77 x 35 x 20 mm (WxHxD) |
| Panel cut-out | 71 x 29 mm (WxH) |
| Front protection | IP55 |
| Ambient temperature | -10÷50°C |



Technical data RU33 display unit

| | |
|---------------------|--------------------------|
| Dimensions | 169 x 38 x 25 mm (WxHxD) |
| Panel cut-out | 163 x 31.5 mm (WxH) |
| Front protection | IP55 |
| Ambient temperature | -10÷50°C |

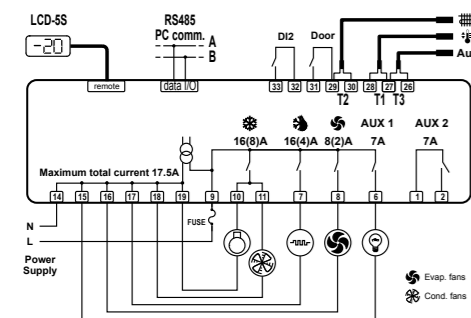

Technical data

| | |
|---------------------|--|
| Range | -50...120°C, -55...240°F |
| Resolution | 0.1 / 1 °C; °F |
| Precision | NTC10K: $\pm 0.3^{\circ}\text{C}$ (-40.0÷70.0°C) PTC1000: $\pm 0.5^{\circ}\text{C}$ (-50÷120°C) |
| Sensor type | Selectable NTC10K standard mod. SN4B20P1/P2/P3 or PTC1000 |
| Power supply | 230V~ ±10% 50÷60Hz 3W |
| Ambient temperature | -10÷50°C |

AH1-5

77 x 35 x 90 mm

Controller for transport refrigeration



Main features

- Refrigeration and heating controller with neutral band
- Selectable NTC10K or PTC input
- Universal 110-230Vac power supply
- FLEXICOLD function for energy saving or alternative setpoint
- Optional control of a second compressor or evaporator
- Excellent evaporator fan control
- Temperature, door open, condenser high temperature/pressure alarms
- Light and standby control (On/Off)
- Connectivity to LAE supervisory systems

Applications

Refrigerated vehicles, plug-in cabinets, refrigerated display cases, control panels.


AH1-5 series

| Functions | | B14L-AG | B14W-AG | C24W-BL |
|--------------------|----------------------|---------|---------|---------|
| Temperature Inputs | Thermostat | • | • | • |
| | Evaporator | • | • | • |
| | Auxiliary | | | • |
| Door switch input | Voltage free contact | • | • | • |
| Digital inputs | Voltage free contact | • | • | |
| | 12÷24Vac voltage | | | • |
| Outputs | Thermostat | • | • | • |
| | Evaporator fans | • | • | • |
| | Defrost | • | • | • |
| | Auxiliary | • | • | • |
| Power supply | 115-230Vac | | • | • |
| | 7-30Vdc | • | | |
| Serial port | TTL serial port | • | • | |
| | RS-485 serial port | | | • |
| Keypad | Generic | • | • | |
| | With light button | | | • |

- › All models come with an alarm buzzer.
- › All models are fitted with detachable screw terminals.
- › On request, the AH1-5 is also available with gasket for a better protection between bezel and metal panel.
- › In order to know more options available for the models, please consult LAE or our local dealer.

Technical Data

| | |
|---------------------|--|
| Control range | -50÷120°C, -55÷240°F |
| Resolution | 0.1 / 1 °C; °F |
| Accuracy | NTC10K: $\pm 0.3^{\circ}\text{C}$ (-40.0÷70.0°C) PTC1000: $\pm 0.5^{\circ}\text{C}$ (-50÷120°C) |
| Sensor type | Selectable NTC10K standard mod. SN4B20P1/P2/P3 or PTC1000 |
| Power supply | 115-230V~ ±10% 50÷60Hz 3W |
| Front protection | IP55 |
| Panel cut-out | 71 x 29 mm (WxH) |
| Ambient temperature | -10÷50°C |

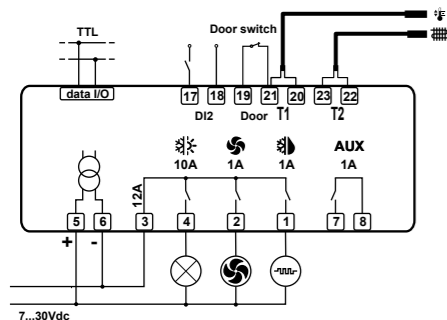

AH1-5B14L-AG

AR2-5

77 x 35 x 90 mm

Universal Refrigeration Controller with RTC



Main features

- Up to six real time defrosts
- Synchronized defrost start and termination with master-slave connection
- Selectable NTC10K or PTC input
- Universal 110-230Vac power supply
- FLEXICOLD function for energy saving or alternative setpoint
- Optional control of a second compressor or evaporator
- Excellent evaporator fan control
- Temperature, door open, condenser high temperature/pressure alarms
- Light and standby control (On/Off)
- Connectivity to LAE supervisory systems

Applications

Plug-in cabinets, supermarket display cases, cold stores, control panels, upright fridges and freezers, refrigerated tables.


AR2-5 series

| Functions | | C14D-BG | B24W-BG | C34W-BG |
|--------------------|-------------------------|---------|---------|---------|
| Temperature inputs | Thermostat | • | • | • |
| | Evaporator | • | • | • |
| | Auxiliary | • | | • |
| Door switch input | Voltage free contact | • | • | • |
| Digital inputs | Voltage free contact | • | | |
| | 12÷24Vac voltage | | • | |
| | Defrost synchronisation | | | • |
| Outputs | Thermostat | • | • | • |
| | Evaporator fans | • | • | • |
| | Defrost | • | • | • |
| | Auxiliary | • | • | • |
| Power supply | 115÷230Vac | | • | • |
| | 12Vac/dc | • | | |
| Serial port | TTL serial port | | | |
| | RS-485 serial port | • | • | • |
| Keypad | Generic | • | • | • |
| | With light button | | | |

- › All models come with an alarm buzzer.
- › All models are fitted with detachable screw terminals.
- › On request, the AR2-5 is also available with gasket for a better protection between bezel and metal panel.
- › In order to know more options available for the models, please consult LAE or our local dealer.

Technical Data

| | |
|---------------------|--|
| Control Range | -50÷120°C, -55÷240°F |
| Resolution | 0.1 / 1 °C; °F |
| Accuracy | NTC10K: $\pm 0.3^{\circ}\text{C}$ (-40.0÷70.0°C) PTC1000: $\pm 0.5^{\circ}\text{C}$ (-50÷120°C) |
| Sensor type | Selectable NTC10K standard mod. SN4B20P1/P2/P3 or PTC1000 |
| Power supply | 115÷230V~ ±10% 50÷60Hz 3W |
| Back-up battery | >150 hours |
| Front protection | IP55 |
| Panel cut-out | 71 x 29 mm (WxH) |
| Ambient temperature | -10÷50°C |

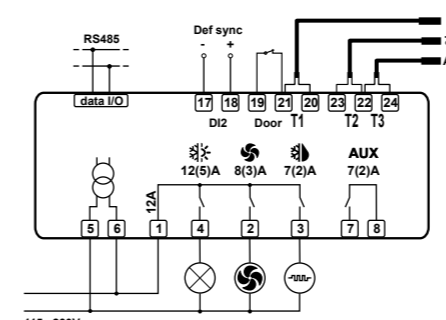

AR2-5C34W-BG

AT1-5

77 x 35 x 77 mm

Refrigeration
Controller
for HT applications

Main Features

- Selectable Refrigerating or Heating control
- Integrated defrost functions
- Runs on mains power supply
- Direct compressor control through high power 16(4)A or 16(8)A relay
- Selectable NTC10K or PTC probe input
- Auxiliary output configurable in four different operation modes
- Temperature, door open alarms
- Optional light control button
- Connectivity to LAE supervisory systems
- UL approved

Applications

Freestanding upright cabinets and counters, cold stores, plug-in display cases, control panels, heated cabinets.


Series AT1-5

| Functions | | AS5E-G | BS2E-BG | BS6E-AL |
|--------------|-------------------|--------|---------|---------|
| Inputs | Thermostat | • | • | • |
| | Evaporator | | • | • |
| | Door switch | | • | • |
| Outputs | Thermostat 16(4)A | | • | |
| | Thermostat 16(8)A | • | | • |
| | Auxiliary 7(2)A | | • | • |
| Power supply | 230Vac | • | • | • |
| | TTL | | | • |
| Serial port | RS-485 | | • | |
| | Generic | • | • | |
| Kaypad | Generic | • | • | |
| | With light button | | | • |

- › Models with removable screw terminal blocks are available. In this case, the letter "S" of code changes in "Q", ex. AT1-5BQ2E-BG.
- › All models come with an alarm buzzer.
- › Versions with 110V power supply are available.
- › On request, the AT1-5 is also available with gasket for a better protection between bezel and metal panel.
- › In order to know more options available for the models, please consult LAE or our local dealer.

Technical Data

| | |
|---------------------|--|
| Control range | -50÷120°C |
| Resolution | 0.1 / 1 °C; °F |
| Accuracy | NTC10K: $\pm 0.3^{\circ}\text{C}$ (-40.0÷70.0°C) PTC1000: $\pm 0.5^{\circ}\text{C}$ (-50÷120°C) |
| Sensor type | selectable NTC10K standard mod. SN4B20P1/P2 or PTC1000 |
| Power supply | 230V~ ±10% 50÷60Hz 3W |
| Front protection | IP55 |
| Panel cut-out | 71 x 29 mm (WxH) |
| Ambient temperature | -10÷50°C |

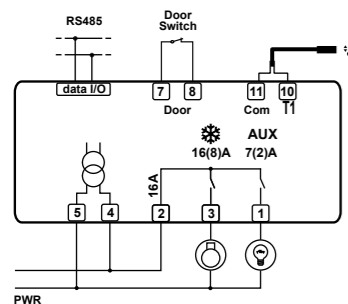

AT1-5AS6E-BG

AT2-5

77 x 35 x 77 mm

Refrigeration
Controller for HT/LT

Main Features

- Selectable Refrigerating or Heating control
- Runs on mains power supply
- Direct compressor control through high power 16(5)A
- Auxiliary output configurable in six different operating modes
- Selectable NTC10K or PTC input
- Electrical, off cycle or hot gas defrost
- Temperature, door open alarms
- Optional light control button
- Connectivity to LAE supervisory systems
- UL approved

Applications

High or Low Temperature upright cabinets and counters, cold stores, plug-in display cases, control panels, heated cabinets.


Series AT2-5

| Functions | | BS4E-G | BS4E-AL | BS4E-BG |
|--------------|--------------------|--------|---------|---------|
| Inputs | Thermostat | • | • | • |
| | Evaporator | • | • | • |
| | Door switch | • | • | • |
| Outputs | Thermostat | • | • | • |
| | Evaporator fans | • | • | • |
| | Auxiliary | • | • | • |
| Power supply | 230Vac | • | • | • |
| | Serial port TTL | | • | |
| Serial port | Serial port RS-485 | | | • |
| | Generic | • | | • |
| Kaypad | Generic | • | | • |
| | With light button | | • | |

- › Models with removable screw terminal blocks are available. In this case, the letter "S" of code changes in "Q", ex. AT2-5BQ4E-AL.
- › All models come with an alarm buzzer.
- › Versions with 110V power supply are available.
- › On request, the AT2-5 is also available with gasket for a better protection between bezel and metal panel.
- › In order to know more options available for the models, please consult LAE or our local dealer.

Technical Data

| | |
|---------------------|--|
| Control Range | -50÷120°C |
| Resolution | 0.1 / 1 °C; °F |
| Accuracy | NTC10K: $\pm 0.3^{\circ}\text{C}$ (-40.0÷70.0°C) PTC1000: $\pm 0.5^{\circ}\text{C}$ (-50÷120°C) |
| Sensor type | Selectable NTC10K standard mod. SN4B20P1/P2 or PTC1000 |
| Power supply | 230V~ ±10% 50÷60Hz 3W |
| Front protection | IP55 |
| Panel cut-out | 71 x 29 mm (WxH) |
| Ambient temperature | -10÷50°C |

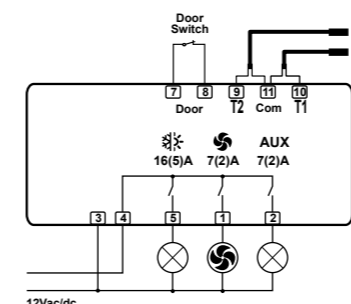

AT2-5BS4E-G

BD1-28

107 x 95 x 47 mm

Split Comprehensive Refrigeration Controller



Main features

- Refrigeration controller with cyclic defrosts
- Enhanced ECO Energy Saving management
- Optional compressor variable speed control
- Suitable for R290
- Up to 2 auxiliary configurable outputs (Light, switched loads, second evaporator etc.)
- Universal mains power supply
- Connectivity to hard-wired supervisory systems
- Many display options: coloured LED's with DU5S, capacitive touch TU5S or high contrast LCD, fully customised


Applications

Upright refrigerators, plug-in and supermarket display cases, cold stores, control panels.

BD1-28 series

| Functions | | B0Q3W-A | C1S4WH-B | C1S5W-B |
|-------------------------|--|---------|----------|---------|
| Temperature inputs | Thermostat | • | • | • |
| | Evaporator | • | • | • |
| | Auxiliary | | • | • |
| DI1, DI2 digital inputs | Voltage free contact | • | • | • |
| | Voltage free contact/defrost synchronization | | • | • |
| DI3 aux. digital input | Thermostat | • | • | • |
| | Evaporator fans | • | • | • |
| | Defrost | • | • | • |
| | Auxiliary 1 | | • | • |
| | Auxiliary 2 | | | • |
| Connections | Quick with M/F connectors | • | | |
| | Screw terminals | | • | • |
| Power supply | 100÷240Vac | • | • | • |
| R290 option | | | • | |
| Aux functions | TTL serial port | • | | |
| | RS485 serial port | | • | • |

- › All models come with an alarm buzzer.
- › In order to know more options available, please consult LAE or our local dealer.

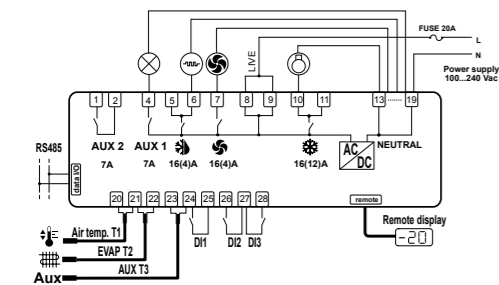

BD1-28C1S5W-B

Technical Data

| | |
|---------------------|--------------------------------------|
| Range | -50÷110°C, -58÷180°F |
| Resolution | 0.1 / 1 °C; °F |
| Precision | <±0.5°C within the measurement range |
| Sensor type | Mod. standard SN4B20P1/P2/P3 |
| Power supply | 100÷240Vac ±10% 50÷60Hz 3W |
| Ambient temperature | -10÷50°C |

BR1-28

107 x 95 x 47 mm

Clever Split Refrigeration Controller with RTC



Main features

- Up to six real time defrosts per day
- Enhanced ECO Energy Saving management
- Optional compressor variable speed control
- Suitable for R290
- Up to 2 auxiliary configurable outputs (Light, switched loads, second evaporator etc.)
- Universal mains power supply
- Connectivity to hard-wired supervisory systems
- Many display options: coloured LED's with DU5S, capacitive touch TU5S or high contrast LCD, fully customised
- UL approved


Applications

Upright refrigerators, plug-in and supermarket display cases, cold stores, control panels.

BR1-28 series

| Functions | | B0Q3W-A | C1S4WH-B | C1S5W-B |
|-------------------------|--|---------|----------|---------|
| Temperature inputs | Thermostat | • | • | • |
| | Evaporator | • | • | • |
| | Auxiliary | | • | • |
| DI1, DI2 digital inputs | Voltage free contact | • | • | • |
| | Voltage free contact/defrost synchronization | | • | • |
| DI3 aux. digital input | Thermostat | • | • | • |
| | Evaporator fans | • | • | • |
| | Defrost | • | • | • |
| | Auxiliary 1 | | • | • |
| | Auxiliary 2 | | | • |
| Connections | Quick with M/F connectors | • | | |
| | Screw terminals | | • | • |
| Power supply | 100÷240Vac | • | • | • |
| R290 option | | | • | |
| Aux functions | TTL serial port | • | | |
| | RS485 serial port | | • | • |

- › All models come with an alarm buzzer.
- › In order to know more options available, please consult LAE or our local dealer.

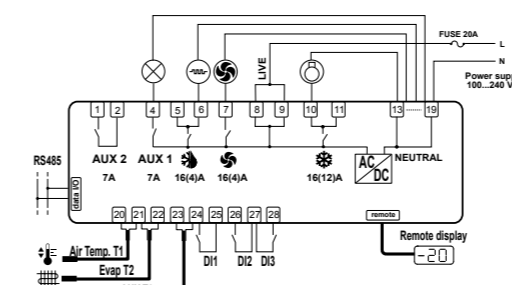

BR1-28C1S5W-B

Technical Data

| | |
|---------------------|--------------------------------------|
| Range | -50÷110°C, -58÷180°F |
| Resolution | 0.1 / 1 °C; °F |
| Precision | <±0.5°C within the measurement range |
| Sensor type | NTC10, standard mod. SN4B20P1/P2/P3 |
| Power supply | 100÷240Vac ±10% 50÷60Hz 3W |
| Ambient temperature | -10÷50°C |

BR1-27

71 x 97 x 61 mm DIN rail


Clever Split Refrigeration Controller with RTC



BR1-27 series

| Functions | | C1S5W-B |
|-------------------------|--|---------|
| Temperature inputs | Thermostat | • |
| | Evaporator | • |
| | Auxiliary | • |
| DI1, DI2 digital inputs | Voltage free contact / Defrost synchronisation | • |
| | | |
| Outputs | Thermostat | • |
| | Evaporator fans | • |
| | Defrost | • |
| | Auxiliary 1 | • |
| | Auxiliary 2 | • |
| Connections | Screw terminals | • |
| Power supply | 100÷240Vac | • |
| Aux. functions | RS485 serial port | • |

› All models come with an alarm buzzer.
› In order to know more options available, please consult LAE or our local dealer.

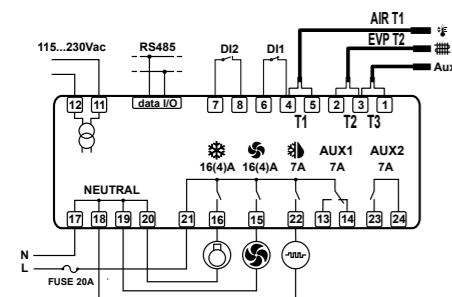

BR1-27C1S5W-B

| Technical Data | |
|---------------------|--------------------------------------|
| Range | -50÷110°C, -58÷180°F |
| Resolution | 0.1 / 1 °C; °F |
| Precision | <±0.5°C within the measurement range |
| Sensor type | NTC10K mod. standard SN4B20P1/P2/P3 |
| Power supply | 100÷240Vac ±10% 50÷60Hz 3W |
| Ambient temperature | -10÷50°C |

BIT25

86 x 82 x 44 mm

Split HT/LT Refrigeration Controller



BIT25 series

| Functions | | BS1E-A | B1S2E-A | B1S3WH-B |
|--------------------|-------------------|--------|---------|----------|
| Temperature inputs | Thermostat | • | • | • |
| | Evaporator | • | • | • |
| Digital inputs | DI1 digital input | • | • | • |
| | DI2 digital input | • | • | • |
| Outputs | Thermostat | • | • | • |
| | Auxiliary 1 | | • | • |
| | Auxiliary 2 | | | • |
| R290 option | | | | • |
| Power supply | 230Vac | • | • | |
| | 115Vac | | | |
| | 100÷240Vac | | | • |
| Serial port | TTL | • | • | |
| | RS-485 | | | • |


› All models come with an alarm buzzer and DI1 digital input.
› In order to know more about versions available for the models, please consult LAE or our local dealer.

Main features

- Three highly rated relay outputs
- Configurable control of Aux 1 and Aux 2 outputs
- Alternate set of parameters for energy saving
- Management of multiple alarms
- Option of setpoint adjustment via a potentiometer, no display
- Standby button (On/Off)
- Universal power supply 100-240V
- Suitable for R290
- Connection to LAE supervisory systems
- UL approved

Applications

Upright refrigerators, bottle coolers, plug-in display cases for shops and supermarkets, cold stores, control panels.

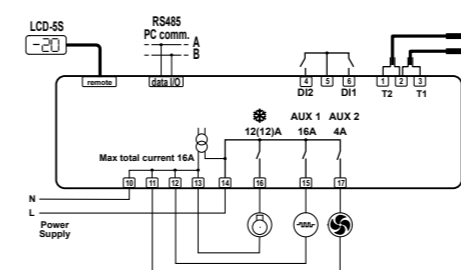

BIT25B1S3W-B

Technical Data

| | |
|---------------------|---|
| Range | -50...110°C, -58...180°F |
| Resolution | 0.1 / 1 °C; °F |
| Precision | <±0.5°C within the measurement range |
| Sensor type | NTC10K mod. standard SN4B20P1/P2 |
| Power supply | 115Vac, 230Vac or universal 100..240Vac ±10% 50÷60Hz 3W |
| Ambient temperature | -10÷50°C |

LCD-5S display unit

| | |
|------------------|-------------------------|
| Dimensions | 77 x 35 x 20 mm (WxHxD) |
| Panel cut-out | 71 x 29 mm (WxH) |
| Front protection | IP55 |

DISPLAYS

Displays for BD / BR1-28



| DU5S Red, Blue or Amber LED display unit | |
|--|-----------------------------|
| Dimensions | 77 x 35 x 20 mm (W x H x D) |
| Panel cut-out | 71 x 29 mm (W x H) |
| Front protection | IP55 |
| Ambient temperature | -10÷50°C |



| TU5S Blue LED capacitive touch display unit | |
|---|-----------------------------|
| Dimensions | 77 x 35 x 13 mm (W x H x D) |
| Panel cut-out | 71 x 29 mm (W x H) |
| Panel thickness | 0.9 to 1.2 mm |
| Front protection | IP55 |
| Ambient temperature | -10÷50°C |



| DU00 High contrast LCD display | |
|--|-----------------------------|
| Dimensions | 78 x 64 x 15 mm (W x H x D) |
| Panel cut-out | 57 x 60 mm (W x H) |
| Front protection with external overlay | IP67 |
| Ambient temperature | -10÷50°C |

| Model | Features |
|----------|----------------|
| DU5S | Red LEDs |
| DU5S-AMB | Amber LEDs |
| DU5S-BLU | Blue LEDs |
| DU00-02 | With buzzer |
| DU00-03 | Without buzzer |
| TU5S-BLU | Blue LEDs |

› In order to know MOQ per model and options available, please consult LAE or our local dealer.

LCD32

196 x 38 x 78 mm

Compact multi-function refrigeration controller



Main features

- Panel thermostat for High and Low Temperature
- Runs on mains power supply
- Evaporator fan control
- Electrical, hot gas or off cycle defrost
- Light or auxiliary load control
- Quick connectors for Lives and Neutrals
- Two operating parameter sets
- Door open, high/low temperature, HP alarms
- Automatic condenser clean warning
- Connection to LAE supervisory systems

Applications


Cold stores, refrigerating cabinets, tables and counters, saladettes, medical cabinets and display cases, both static and ventilated.

LCD32 series

| Functions | | Q4E-C | S4E-C |
|---------------------|--------------------|-------|-----------------|
| Connections | | Quick | Screw terminals |
| Inputs | Thermostat | • | • |
| | Evaporator | • | • |
| Outputs | Thermostat | • | • |
| | Defrost | • | • |
| | Evaporator fans | • | • |
| | Auxiliary | • | • |
| Options | Door switch + aux. | • | • |
| | TTL serial port | | |
| | RS485 serial port | • | • |
| Power supply | 230Vac | • | • |

› On request the LCD32 is also available with gasket for a better protection between bezel and metal panel. In this case, the code changes in, for ex. LCD32Q4E-CS. Please ask information about standard versions available with this option.

› In order to know versions available, please consult LAE or our local dealer.

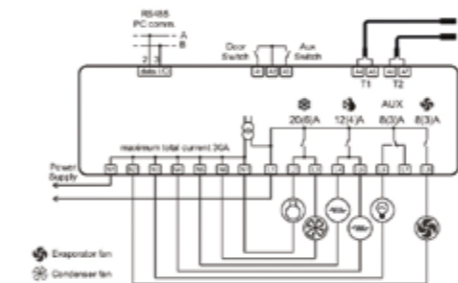

LCD32Q4E-C

Technical Data

| | |
|---------------------|--------------------------------|
| Programming Range | -30.0÷30.0°C |
| Resolution | 0.1 / 1; °C / °F |
| Accuracy | <±0.2°C (-30.0÷30.0°C) |
| Sensor type | NTC, standard mod. SN2B20P1/P2 |
| Power supply | 230Vac ±10%; 50/60Hz; 3W |
| Front protection | IP55 |
| Panel cut-out | 163 x 31.5 mm |
| Ambient temperature | -10÷50°C |

MS-27

71 x 97 x 61 mm DIN Rail

Multi-compressor or multi-fan controller



Main features

- Four ON/OFF outputs for the control of single or multi-stage compressors or fans.
- Proportional output for speed control (inverters).
- Output with change-over contacts for alarm control.
- Input for pressure transmitter (0/4...20mA) or for a temperature probe (NTC10K).
- Two digital inputs on voltage free contact for programmable function, up to three digital optocoupled voltage inputs for a complete system diagnostics.
- Selection of the control algorithm: rotation of outputs, sequential activation, optimisation of the available power.
- Pressure – Temperature conversion according to gas used.
- Storage of the latest nine alarms.
- Automatic maintenance management.
- Connectivity to LAE supervisory systems.


Applications

For cryogenerators in supermarkets, cold stores and all cryogenic systems with variable demand.

MS-27 series

| Functions | | -1SE-A | -1SU-B |
|--------------|-----------------|--------|--------|
| Connections | Screw terminals | • | • |
| Power supply | 230Vac | • | |
| | 115Vac | | • |
| Serial port | TTL | • | |
| | RS485 | | • |

› In order to know more options available for the models, please consult LAE or our local dealer.

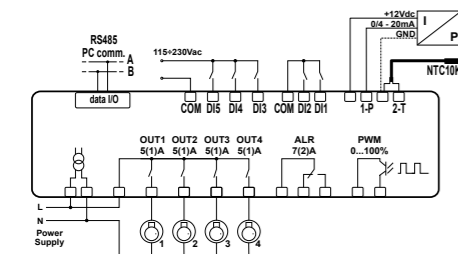

MS27-1SE-B

TMR15

77 x 35 x 77 mm

Countdown timer



Main features

- Panel moun timer
- Countdown in hours and minutes or minutes and seconds
- Manual start/stop of countdown
- Remote start of countdown
- Manual switching on/off of output
- Mains powered
- Buzzer to warn countdown end
- Keypad lock

Applications


Control of duration of industrial processes, control of dough retarders, control of cooking time in ovens.

TMR15 series

| Standard versions | Power supply | Buzzer |
|-------------------|-------------------|--------|
| TMR15E | 230Vac ±10%, 3W | |
| TMR15E-A | 230Vac ±10%, 3W | • |
| TMR15D-A | 12Vac/dc ±10%, 3W | • |

Technical Data

| | |
|---------------------|------------------|
| Outputs | Out 16(4)A 240V- |
| Power supply | 230Vac ±10% 3W |
| Front protection | IP55 |
| Panel cut-out | 71 x 29 mm (WxH) |
| Ambient temperature | -10÷50°C |

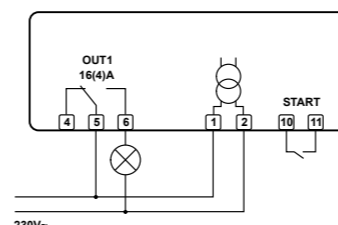

TMR15E-A

TAB 5.0

Monitoring, Logging and Programming Software



Main Features

- Overall plant monitoring
- Storage of temperature, humidity, pressure, alarms
- Display and printing in numerical and graphic form of stored data
- Export of stored data for Excel* or other spread sheets
- Diagnostics with dynamic graphs of all analog and digital inputs
- Virtual instrument for analysing the system and setting regulator parameters
- Direct sending of emails and SMS relating to the alarm state
- Connection to remote PC for tele-servicing via Internet
- Languages available: English, German, Italian, Polish.

Available options


Available as full optional as described above but also in a "low cost version" for data logging only. This version is called TAB LV

Applications

Supervision of the refrigeration process in supermarkets, convenience stores, shops, petrol stations, large kitchens, food factories, cruise ships etc.

System Requirements

- › Computer with Windows 7/8/10 operating system installed and properly running, minimum processor and memory as required from Windows version – USB port – Mouse
- › 1024x768 pixel screen resolution
- › 10GB available on Hard Disk
- › RS232 serial port (COM) required if a GSM modem is fitted
- › USB to RS-485 converter mod. USB485-STIXL. Up to 200 controllers connectable. Every 62 controllers, you must add a repeater ATC-109N

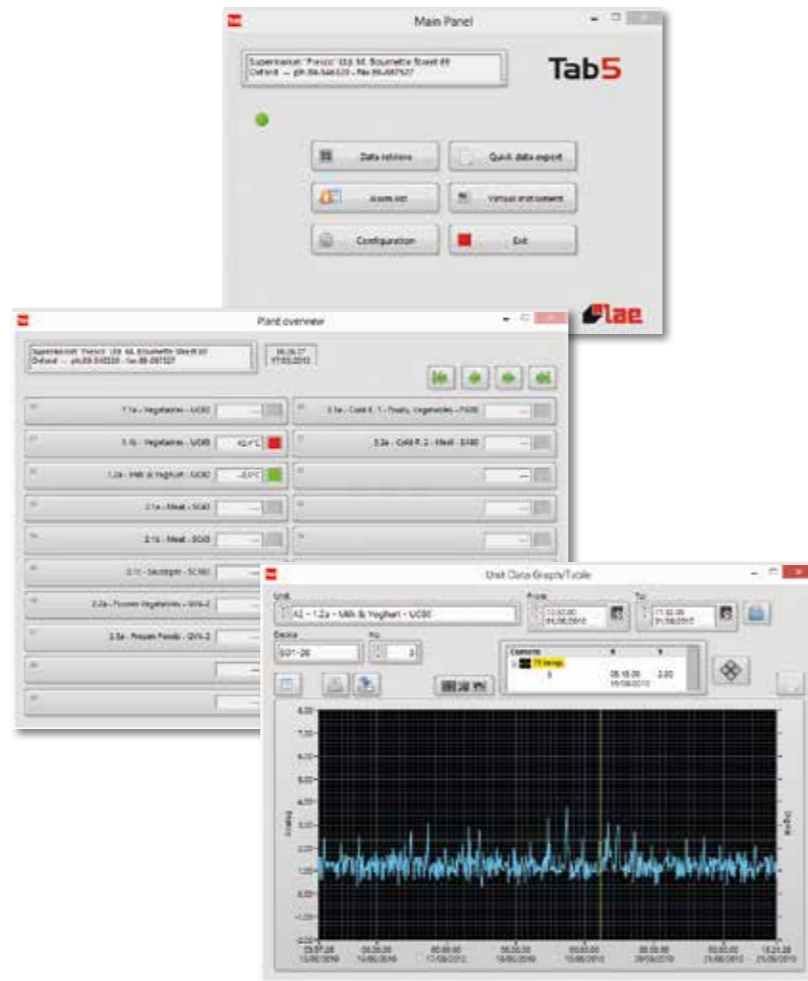

HT2WAD

Humidity transmitters



| Technical data | |
|-----------------------------|--|
| Sensor type | capacitive |
| Output signal | 0÷1Vdc |
| Range | 0%÷100% r.H. |
| Accuracy | ±5% r.H. (25%÷75% r.H.) |
| Sheath | Ø14 x 40 mm |
| Protection | IP65 (electronics) |
| Operating temperature | 0÷75°C (sensor) / 0÷50°C (electronics) |
| Dimensions of the enclosure | 110 x 53 x 75 mm (electronics) |
| Power supply | 12Vdc, 0.2W |

PGT35

Pressure Transmitter



| Technical data | |
|---------------------|-----------------------------------|
| Sensor type | Piezoresistive gauge |
| Output | 4÷20mA |
| Range | -0.5÷35.0 bar |
| Accuracy | max±1%FS (0÷50°C) |
| Sheath | Ø 17 x 58 mm |
| Connections | mPm connector |
| Pressure port | 7/16"-20UNF male, steel AISI 316L |
| Protection | IP65 |
| Ambient temperature | -40÷100°C |
| Power supply | 8÷32Vdc |

NTC2K & NTC10K

Temperature probes

| SN2BxxPx | | Standard Versions | |
|-------------|--|-------------------|-------|
| Sensor type | NTC2K, 2000Ω @ 25°C | SN2B15P1, P2 | 1.5 m |
| Range | -40÷120°C | SN2B20P1, P2 | 2 m |
| Accuracy | ±0.3°C @ 25°C | SN2B25P1, P2 | 2.5 m |
| Sheath | ∅ 6 x 29 mm; TPE | SN2B30P1, P2, P3 | 3 m |
| Cable | 2 wires x 0.35 mm ² ; -40÷120°C; TPE; loose leads | SN2B50P1 | 5 m |
| Protection | IP67 | | |



SN2B / SN4BxxP1, P2

| SN4BxxPx | | Standard Versions | |
|-------------|--|-------------------|-------|
| Sensor type | NTC10K, 10000Ω @ 25°C | SN4B10P1 | 1 m |
| Range | -40÷120°C | SN4B15P1, P2 | 1.5 m |
| Accuracy | ±0.3°C @ 25°C | SN4B20P1, P2 | 2 m |
| Sheath | ∅ 6 x 29 mm; TPE | SN4B25P1, P2 | 2.5 m |
| Cable | 2 wires x 0.35 mm ² ; -40÷120°C; TPE; loose leads | SN4B30P1, P2 | 3 m |
| Protection | IP67 | SN435P1, P2 | 3.5 m |
| | | SN4B40P1 | 4 m |
| | | SN4B50P1, P2 | 5 m |
| | | SN4B70P1 | 7 m |



SN4BxxP3-Y

| SN4BxxPx | | Standard Versions | |
|-------------|--|-------------------|-------|
| Sensor type | NTC10K, 10000Ω @ 25°C | SN4B10P1 | 1 m |
| Range | -40÷120°C | SN4B15P1, P2 | 1.5 m |
| Accuracy | ±0.3°C @ 25°C | SN4B20P1, P2 | 2 m |
| Sheath | ∅ 6 x 29 mm; TPE | SN4B25P1, P2 | 2.5 m |
| Cable | 2 wires x 0.35 mm ² ; -40÷120°C; TPE; loose leads | SN4B30P1, P2 | 3 m |
| Protection | IP67 | SN435P1, P2 | 3.5 m |
| | | SN4B40P1 | 4 m |
| | | SN4B50P1, P2 | 5 m |
| | | SN4B70P1 | 7 m |



SN4BxxP4-S

| SN4BxxPx | | Standard Versions | |
|-------------|--|-------------------|-------|
| Sensor type | NTC10K, 10000Ω @ 25°C | SN4B10P1 | 1 m |
| Range | -40÷120°C | SN4B15P1, P2 | 1.5 m |
| Accuracy | ±0.3°C @ 25°C | SN4B20P1, P2 | 2 m |
| Sheath | ∅ 6 x 29 mm; TPE | SN4B25P1, P2 | 2.5 m |
| Cable | 2 wires x 0.35 mm ² ; -40÷120°C; TPE; loose leads | SN4B30P1, P2 | 3 m |
| Protection | IP67 | SN435P1, P2 | 3.5 m |
| | | SN4B40P1 | 4 m |
| | | SN4B50P1, P2 | 5 m |
| | | SN4B70P1 | 7 m |



SN4BxxP4-S

| SN4BxxPx | | Standard Versions | |
|-------------|--|-------------------|-------|
| Sensor type | NTC10K, 10000Ω @ 25°C | SN4B10P1 | 1 m |
| Range | -40÷120°C | SN4B15P1, P2 | 1.5 m |
| Accuracy | ±0.3°C @ 25°C | SN4B20P1, P2 | 2 m |
| Sheath | ∅ 6 x 29 mm; TPE | SN4B25P1, P2 | 2.5 m |
| Cable | 2 wires x 0.35 mm ² ; -40÷120°C; TPE; loose leads | SN4B30P1, P2 | 3 m |
| Protection | IP67 | SN435P1, P2 | 3.5 m |
| | | SN4B40P1 | 4 m |
| | | SN4B50P1, P2 | 5 m |
| | | SN4B70P1 | 7 m |



SN4BxxP4-S

| SN4BxxPx | | Standard Versions | |
|-------------|--|-------------------|-------|
| Sensor type | NTC10K, 10000Ω @ 25°C | SN4B10P1 | 1 m |
| Range | -40÷120°C | SN4B15P1, P2 | 1.5 m |
| Accuracy | ±0.3°C @ 25°C | SN4B20P1, P2 | 2 m |
| Sheath | ∅ 6 x 29 mm; TPE | SN4B25P1, P2 | 2.5 m |
| Cable | 2 wires x 0.35 mm ² ; -40÷120°C; TPE; loose leads | SN4B30P1, P2 | 3 m |
| Protection | IP67 | SN435P1, P2 | 3.5 m |
| | | SN4B40P1 | 4 m |
| | | SN4B50P1, P2 | 5 m |
| | | SN4B70P1 | 7 m |



SN4BxxP4-S

PTC1000

Temperature probes

| QT1KxxP1/P2 | | Standard versions | |
|-------------|---|-------------------|-------|
| Sensor type | KTY82-121, 1000 Ohm @ 25°C | QT1K20P1, P2 | 2 m |
| Range | -40÷120°C | QT1K30P1, P2 | 3 m |
| Precision | ±1.5°C @ 25°C | QT1K35P1 | 3.5 m |
| Tube | ∅ 6 x 20 mm; AISI 304 steel | QT1K40P1 | 4 m |
| Cable | 2 wires x 0.25 mm ² ; thermoplastic rubber flat cable 1.65mm x 3.60mm; loose leads | QT1K50P1, P2 | 5 m |
| Protection | IP67 | | |

| QT1KxxP-X | | Standard versions | |
|-------------|---|-------------------|-----|
| Sensor type | KTY82-121, 1000 Ohm @ 25°C | QT1K20P-X | 2 m |
| Range | -40÷120°C | QT1K30P-X | 3 m |
| Accuracy | ±1.5°C @ 25°C | QT1K50P-X | 5 m |
| Tube | ∅ 6 x 40 mm; AISI 304 steel | | |
| Cable | 2 wires x 0.25 mm ² ; thermoplastic rubber flat cable 1.65mm x 3.60mm; loose leads | | |
| Protection | IP67 | | |

MOQ: 10 pieces

| QT1KxxC 1/C2/C3 | | Standard versions | |
|-----------------|--|-------------------|-------|
| Sensor type | KTY82-121, 1000 Ohm @ 25°C | QT1K15C1, C2 | 1.5 m |
| Range | -40÷120°C | QT1K20C1, C2, C3 | 2 m |
| Precision | ±1.5°C @ 25°C | QT1K25C1, C2 | 2.5 m |
| Tube | ∅ 6 x 20 mm; AISI 304 steel | QT1K30C1 | 3 m |
| Cable | 2 wires x 0.25 mm ² ; thermoplastic rubber flat cable 1.65mm x 3.60mm; connectors | QT1K35C1, C2 | 3.5 m |
| Protection | IP67 | QT1K50C1 | 5 m |
| | | QT1K60C1 | 6 m |

| QT1LxxP-X | | Standard versions | |
|-------------|--|-------------------|-----|
| Sensor type | KTY82-121, 1000 Ohm @ 25°C | QT1L20P-X | 2 m |
| Range | -40÷110°C | | |
| Precision | ±1.5°C @ 25°C | | |
| Tube | ∅ 6 x 20 mm; AISI 304 steel | | |
| Cable | 2 wires x 0.25mm ² ; double insulated, thermoplastic rubber cable ∅3.3mm; loose leads | | |
| Protection | IP67 | | |

MOQ: 10 pieces

| QT1NxxP-/01 | | Standard versions | |
|-------------|---|-------------------|-----|
| Sensor type | KTY82-121, 1000 Ohm @ 25°C | QT1N20P-/01 | 2 m |
| Range | -40÷110°C | QT1N30P-/01 | 3 m |
| Precision | ±1.5°C @ 25°C | | |
| Tube | ∅ 6 x 40 mm; AISI 304 steel | | |
| Cable | 2 wires x 0.25mm ² ; screened silicon cable ∅ 4.6mm; loose leads | | |
| Protection | IP67 | | |

MOQ: 10 pieces

Pt100 & thermocouples

Temperature probes

| QP1NxxP-X | |
|-------------|--|
| Sensor Type | Pt100 class B |
| Range | -40÷110°C |
| Precision | ±0.3°C @ 0°C |
| Tube | Ø 6 x 40 mm; AISI 304 steel |
| Cable | 3 wires x 0.25mm ² ; thermoplastic rubber cable Ø 3.4 mm; loose leads |
| Protection | IP67 |

Standard versions

| | |
|----------------|-----|
| QP1N20P-X | 2 m |
| MOQ: 10 pieces | |

| SPT0 | |
|---------------|---|
| Sensor Type | Pt100 class "B" (DIN43760), 100Ω @ 0°C |
| Range | 0÷400°C |
| Precision | ±0.3°C or ±0.5°C (in the worst case scenario) |
| Response time | 10 seconds in water |
| Sheath | Ø 6 x 160 mm; stainless steel AISI316 |
| Cable | 3 wires x 0.24 mm ² ; L = 100 cm, fiber glass, loose leads |
| Protection | IP65 |



| TJ.ECO | |
|---------------|---|
| Sensor Type | J thermocouple |
| Range | 0÷450°C |
| Precision | ±2.5°C or ±0.75% (in the worst case scenario) |
| Response time | 10 seconds in water |
| Sheath | Ø 6 x 160 mm; stainless steel AISI316 |
| Cable | 2 wires x 0.50 mm ² ; L = 300 cm, fiber glass, loose leads |
| Protection | IP65 |



| TK.ECO | |
|---------------|---|
| Sensor Type | K thermocouple |
| Range | 0÷600°C |
| Precision | ±2.5°C or ±0.75% (in the worst case scenario) |
| Response time | approx. 2 seconds in water |
| Sheath | Ø 4.5 x 160 mm; INCONEL600 |
| Cable | 2 wires x 0.24 mm ² ; L = 300 cm, fiber glass, loose leads |
| Protection | IP65 |



www.lae-electronic.com

LAE ELECTRONIC

Via Padova, 25 - 31046 Oderzo (Treviso) ITALY

Tel. +39 0422.815320 Fax +39 0422.814073